

#### Twin Quadplexer, 700/850/PCS/AWS-WCS, DC Sense, 4.3-10

- BTS-to-feeder and feeder-to-antenna application
- Automatic dc switching with dc sense
- Convertible mounting brackets
- New 4.3-10 connectors for improved PIM performance and size reduction
- Stackable in multiples with included hardware

#### Product Classification

Product Type Quadplexer

### General Specifications

Product Family CBC781921W

**Color** Gray

Common Port LabelCommonModularity2-Twin

Mounting Pole | Wall

Mounting Pipe Hardware Band clamps (2)

**RF Connector Interface** 4.3-10 Female

#### **Dimensions**

**Height** 185 mm | 7.283 in

**Width** 273.5 mm | 10.768 in


**Depth** 114 mm | 4.488 in


**Ground Screw Diameter** 6 mm | 0.236 in


**Mounting Pipe Diameter Range** 40–160 mm




## Outline Drawing









## **Electrical Specifications**

**Impedance** 50 ohm

**License Band, Band Pass**AWS 1700 | CEL 850 | LMR 750 | PCS 1900 | USA 700 | USA 750 | WCS

2300

### Electrical Specifications, dc Power/Alarm

dc/AISG Pass-through MethodAuto sensingdc/AISG Pass-through PathSee logic table

**Lightning Surge Current** 5 kA

**Lightning Surge Current Waveform** 8/20 waveform

Operating Current at Voltage 15 mA @ 12 V | 15 mA @ 24 V

ANDREW® an Amphenol company

Voltage 7–30 Vdc

Electrical Specifications, AISG

**AISG Carrier** 2176 KHz ± 100 ppm

Insertion Loss, maximum1 dBReturn Loss, minimum15 dB

# **Electrical Specifications**

Sub-module	1   2	1   2	1   2	1   2	1   2
Branch	1	2	3	4	4
Port Designation	698-803	824-894	1850-1990	AWS-WCS	AWS-WCS
License Band	LMR 750, Band Pass USA 700, Band Pass USA 750, Band Pass	CEL 850, Band Pas	ss PCS 1900, Band Pass	AWS 1700, Band Pass	WCS 2300, Band Pass

# Electrical Specifications, Band Pass


Frequency Range, MHz	698-803	824-894	1850-1990	1695-1780 2110-2200	2305-2360
Insertion Loss, maximum, dB	0.5	0.5	0.5	0.5	0.4
Insertion Loss, typical, dB	0.3	0.3	0.3	0.3	0.2
Total Group Delay, maximum, ns	50	55	55	25	25
Return Loss, minimum, dB	20	20	20	20	20
Return Loss, typical, dB	22	22	22	22	22
Isolation, minimum, dB	50	50	50	50	50
Isolation, typical, dB	65	55	55	55	55
Input Power, RMS, maximum, W	200	200	200	200	200
Input Power, PEP, maximum, W	2000	2000	2000	2000	2000
3rd Order PIM, typical, dBc	-161	-161	-161	-161	
3rd Order PIM Test Method	2 x 20 W CW tones	2 x 20 W CW tones	2 x 20 W CW tones	1 x 20 W AWS CW tone 1 x 20 W PCS CW tone	

Higher Order PIM, typical, dBc -161

**Higher Order PIM Test Method** 2 x 20 W CW tones

Block Diagram



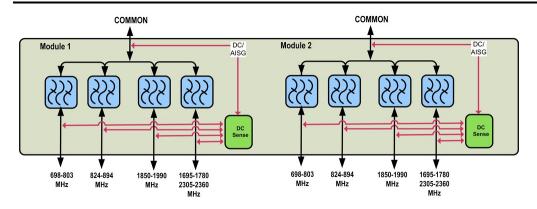

## Logic Table

	Combining Mode Operation (Ground Based)				
	RF Ports Input Voltage				
DC/AISG Path Selection	COMMON	AWS/WCS	PCS	850 MHz	700 MHz
700 MHz to COMMON "ON"	<7	<7	<7	<7	7 ≤ V ≤ 30
850 MHz to COMMON "ON"	<7	<7	<7	7 ≤ V ≤ 30	<7
PCS to COMMON"ON"	<7	<7	7 ≤ V ≤ 30	<7	<7
AWS/WCS to COMMON "ON"	<7	7 ≤ V ≤ 30	<7	<7	<7
Path selection will follow below priority	<7	n	orts active 7 ≤ V ≤ 30	Any 2 or more n	
AWS (1), 700MHz (2), PCS (3), 850MHz (4	\'\	Ally 2 of filore ports active 7 3 v 3 30			

	Splitting Mode Operation (Tower Top)					
	RF Ports Impedance DC (Load sensing)					
DC/AISG Path Selection	COMMON	AWS/WCS	PCS	850 MHz	700 MHz	
COMMON to 700 MHz "ON"	7 ≤ V ≤ 30	short	short	short	open/load	
COMMON to 850 MHz "ON"	7 ≤ V ≤ 30	short	short	open/load	short	
COMMON to PCS "ON"	7 ≤ V ≤ 30	short	open/load	short	short	
COMMON to AWS/WCS "ON"	7 ≤ V ≤ 30	open/load	short	short	short	
DC/AISG will be routed to ALL ports with open/load impedance	7 ≤ V ≤ 30	ports open/load impedance $7 \le V \le 30$		Any 2 or more ports open/load impedance		

## **Environmental Specifications**

**Operating Temperature**  $-40 \,^{\circ}\text{C}$  to  $+65 \,^{\circ}\text{C}$  (-40  $^{\circ}\text{F}$  to  $+149 \,^{\circ}\text{F}$ )

**Corrosion Test Method** IEC 60068-2-11, 30 days

Ingress Protection Test Method IEC 60529:2001, IP67

Packaging and Weights

IncludedMounting hardwareMounting Hardware Weight0.5 kg | 1.102 lb

Weight, without mounting hardware 7.6 kg | 16.755 lb

