

Fiber indoor/outdoor cable, 12-fiber, Multimode OM4, Gel-free, Meters jacket marking, Black jacket color, Dca flame rating, 2000 m. Provides Rodent Resistance

Product Classification

| | |
|------------------------------|-------------------------------------|
| Regional Availability | Asia Australia/New Zealand EMEA |
| Portfolio | CommScope® |
| Product Type | Fiber indoor/outdoor cable |
| Product Series | C-CN |


General Specifications

| | |
|-------------------------------------|---|
| Cable Type | Loose tube |
| Subunit Type | Gel-free |
| Jacket Color | Black |
| Jacket Marking | Meters |
| Jacket Marking Method | Inkjet |
| Jacket Marking Text | COMMSCOPE GB F.O. CABLE 760244295 INT/EXT RODENT RESIST DLT 12X9/125 OS2 EN50575 CLASS D (Serial NUMBER) (METRE MARK) |
| Fibers per Subunit, quantity | 12 |
| Total Fiber Count | 12 |

Dimensions

| | |
|-----------------------------|----------------------|
| Cable Length | 2000 m 6,561.68 ft |
| Diameter Over Jacket | 6.4 mm 0.252 in |

Representative Image

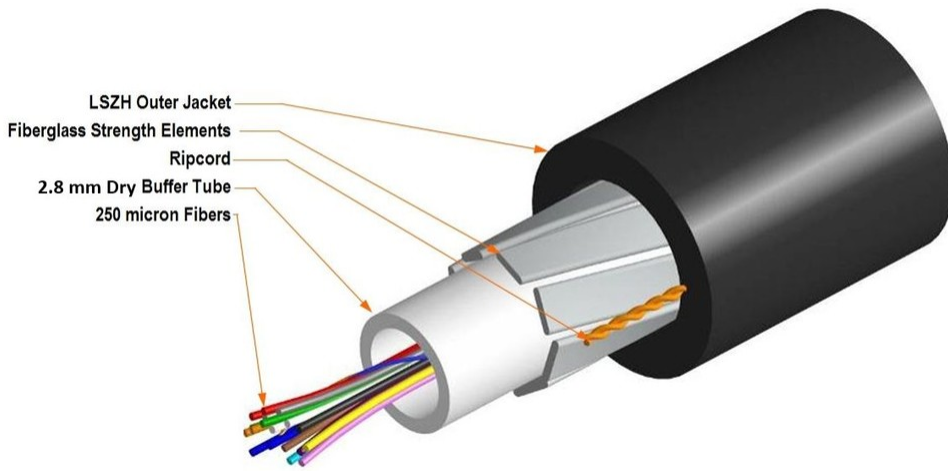

Mechanical Specifications

| | |
|--|----------------------|
| Minimum Bend Radius, loaded | 139.7 mm 5.5 in |
| Minimum Bend Radius, unloaded | 129.5 mm 5.098 in |
| Tensile Load, long term, maximum | 650 N 146.126 lbf |
| Tensile Load, short term, maximum | 1250 N 281.011 lbf |

Optical Specifications

| | |
|-------------------|-----|
| Fiber Type | OM4 |
|-------------------|-----|

Optical Specifications, Wavelength Specific

| | |
|-----------------------------|---|
| Attenuation, maximum | 0.35 dB/km @ 1,300 nm 0.35 dB/km @ 1,550 nm 0.45 dB/km @ 1,310 nm |
| Standards Compliance | IEC 60794-1 TIA-492CAAB (OS2) |

Environmental Specifications

| | |
|---|--------------------------------------|
| Installation temperature | -5 °C to +50 °C (+23 °F to +122 °F) |
| Operating Temperature | -10 °C to +70 °C (+14 °F to +158 °F) |
| Storage Temperature | -10 °C to +70 °C (+14 °F to +158 °F) |
| EN50575 CPR Cable EuroClass Fire Performance | Dca |
| EN50575 CPR Cable EuroClass Smoke Rating | s2 |
| EN50575 CPR Cable EuroClass Droplets Rating | d2 |
| EN50575 CPR Cable EuroClass Acidity Rating | a1 |

760244293 | C-012-CN-5K-M12BK/28D/GY/D

Environmental Space

Universal Low Smoke Zero Halogen (ULSZH)

Packaging and Weights

Cable weight

47 kg/km | 31.583 lb/kft

Included Products

CS-8W-250-EMEA - LightScope ZWP® Singlemode Fiber
250um

* Footnotes

Operating Temperature Specification applicable to non-terminated bulk fiber cable

LightScope ZWP® Singlemode Fiber



Product Classification

| | |
|---------------------|---------------|
| Portfolio | CommScope® |
| Product Type | Optical fiber |

General Specifications

| | |
|--|--|
| Cladding Diameter | 125 µm |
| Cladding Diameter Tolerance | ±0.7 µm |
| Cladding Non-Circularity, maximum | 0.7 % |
| Coating Diameter (Colored) | 249 µm |
| Coating Diameter (Uncolored) | 242 µm |
| Coating Diameter Tolerance (Colored) | ±13 µm |
| Coating Diameter Tolerance (Uncolored) | ±5 µm |
| Coating/Cladding Concentricity Error, maximum | 12 µm |
| Core/Clad Offset, maximum | 0.5 µm |
| Proof Test | 689.476 N/mm ² 100000 psi |

Dimensions

| | |
|----------------------------|-----------------|
| Fiber Curl, minimum | 4 m 13.123 ft |
|----------------------------|-----------------|

Mechanical Specifications

| | |
|---|---|
| Macrobending, 20 mm Ø mandrel, 1 turn | 0.75 dB @ 1,550 nm 1.50 dB @ 1,625 nm |
| Macrobending, 30 mm Ø mandrel, 10 turns | 0.25 dB @ 1,550 nm 1.00 dB @ 1,625 nm |
| Macrobending, 60 mm Ø mandrel, 100 turns | 0.05 dB @ 1,550 nm 0.05 dB @ 1,625 nm |
| Coating Strip Force, maximum | 8.9 N 2.001 lbf |
| Coating Strip Force, minimum | 1.3 N 0.292 lbf |

CS-8W-250-EMEA | 250um

Dynamic Fatigue Parameter, minimum 20

Optical Specifications

Cabled Cutoff Wavelength, maximum 1250 nm

Point Defects, maximum 0.05 dB

Zero Dispersion Slope, maximum 0.092 ps/[km-nm-nm]

Zero Dispersion Wavelength, maximum 1324 nm

Zero Dispersion Wavelength, minimum 1300 nm

Optical Specifications, Wavelength Specific

Attenuation, maximum 0.21 dB/km @ 1,550 nm | 0.24 dB/km @ 1625 nm | 0.25 dB/km @ 1,490 nm | 0.35 dB/km @ 1,310 nm | 0.35 dB/km @ 1,385 nm

Dispersion, maximum 18 ps(nm-km) at 1550 nm | 2.2 ps(nm-km) at 1625 nm | 3.5 ps(nm-km) from 1285 nm to 1330 nm at 1310 nm

Index of Refraction 1.467 @ 1,310 nm | 1.468 @ 1,550 nm

Mode Field Diameter 10.4 μm @ 1,550 nm | 9.2 μm @ 1,310 nm

Mode Field Diameter Tolerance $\pm 0.4 \mu\text{m}$ @ 1310 nm | $\pm 0.5 \mu\text{m}$ @ 1550 nm

Polarization Mode Dispersion Link Design Value, maximum 0.06 ps/sqrt(km)

Standards Compliance ITU-T G.652.D | ITU-T G.657.A1

Environmental Specifications

Heat Aging, maximum 0.05 dB/km @ 85 °C

Temperature Dependence, maximum 0.05 dB/km

Temperature Humidity Cycling, maximum 0.05 dB/km

Water Immersion, maximum 0.05 dB/km @ 23 °C

* Footnotes

Temperature Dependence, maximum Temperature dependence is conducted at -60 °C to +85 °C (-76 °F to +185 °F)

Temperature Humidity Cycling, maximum Temperature humidity cycling is conducted at -10 °C to +85 °C (+14 °F to +185 °F) up to 95% relative humidity