FDT-AN212NXB0000



iFDT Indoor Fiber Distribution Terminal, 12-fiber, SC/UPC, soft-wall pigtails, heat shrink splice trays

- Compact and secure family of enclosures by connecting fiber cables at MDUs
- Integrated splice trays offer flexible splice management for individual or mass splicing
- Dual-hinged design ensures separation of owner/client network segments
- Robust steel construction protects fibers against damage and ensures network reliability
- Slotted cable entrance ports allow for rapid cable installation and pass-through capability

Product Classification

Regional Availability North America

Product Type Fiber distribution terminal

Product Series IFDT

General Specifications

Adapters, quantity 12

 Cable Entry Location
 Bottom right
 Top right

Cable Type Pigtails - Stranded

Color Putty white

Front Door Type Double hinged

Growth Configuration Fully loaded

Interface SC/UPC

Lock Type Padlock ready

Mounting Wall

Port, quantity 12

Splice Tray Chip Type Heat shrink

Splicing Capacity, maximum 12

Dimensions

 Height
 184.15 mm | 7.25 in

 Width
 299.72 mm | 11.8 in


 Depth
 82.55 mm | 3.25 in

Ordering Tree



Page 1 of 3

FDT-AN212NXB0000

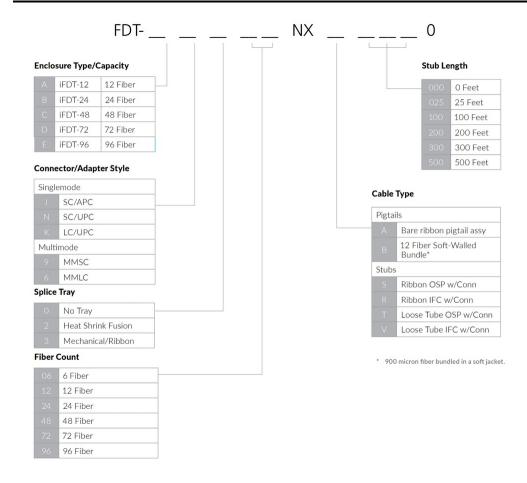

Material Specifications

Finish Powder coated

Material Type Steel

Optical Specifications

Fiber Mode Singlemode

Environmental Specifications

Environmental Space Indoor

Qualification Standards NEMA, Type 12 | Telcordia GR-2898-CORE

Packaging and Weights

Packaging quantity



FDT-AN212NXB0000

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted

