FDT-BJ024NXT2500



iFDT Indoor Fiber Distribution Terminal, 24-fiber, SC/APC, loose tube OSP cable, 2500 feet

- Compact and secure family of enclosures by connecting fiber cables at MDUs
- Integrated splice trays offer flexible splice management for individual or mass splicing
- Dual-hinged design ensures separation of owner/client network segments
- Robust steel construction protects fibers against damage and ensures network reliability
- Slotted cable entrance ports allow for rapid cable installation and pass-through capability

Product Classification

Regional Availability North America

Product Type Fiber distribution terminal

Product Series IFDT

General Specifications

Functionality Patching | Splicing

Adapters, quantity 24

 Cable Entry Location
 Bottom right
 Top right

Cable TypeOSP - Loose Tube

Color Putty white

Front Door Type Double hinged

Growth Configuration Fully loaded

Interface SC/APC

Interface, stub No connector

Lock Type Padlock ready

Mounting Wall

Port, quantity 24

Dimensions

 Height
 203.2 mm | 8 in

 Width
 355.6 mm | 14 in


 Depth
 127 mm | 5 in

 Cable Length
 762 m | 2500 ft



FDT-BJ024NXT2500

Ordering Tree

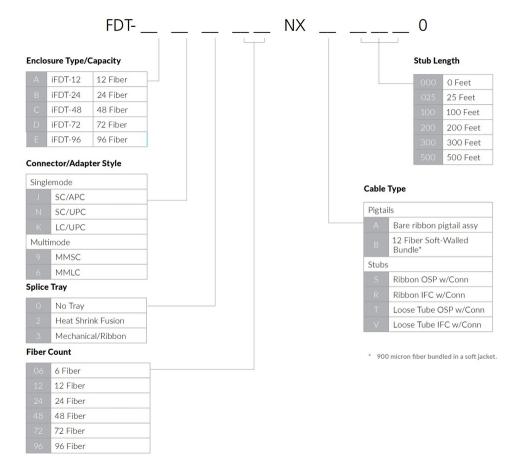

Material Specifications

Finish Powder coated

Material Type Steel

Optical Specifications

Fiber Mode Singlemode

Environmental Specifications

Environmental Space Indoor

Qualification Standards NEMA, Type 12 | Telcordia GR-2898-CORE

Packaging and Weights

Packaging quantity 1

COMMSCOPE®

FDT-BJ024NXT2500

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

REACH-SVHC Compliant as per SVHC revision on www.commscope.com/ProductCompliance

ROHS Compliant/Exempted UK-ROHS Compliant/Exempted

