


# USX6-6W

## Base Product



1.8m | 6ft Sentinel® Ultra High Performance, Super High XPD Antenna, dual-polarized, 5.925 – 7.125 GHz

## Product Classification

|                      |                   |
|----------------------|-------------------|
| <b>Product Type</b>  | Microwave antenna |
| <b>Product Brand</b> | Sentinel®         |

## General Specifications

|                              |  |
|------------------------------|--|
| <b>Antenna Type</b>          | USX - Sentinel® Ultra High Performance, Super High XPD Antenna, dual-polarized |
| <b>Polarization</b>          | Dual   |
| <b>Side Struts, Included</b> | 1  |
| <b>Side Struts, Optional</b> | 1  |

## Dimensions

|                          |              |
|--------------------------|--------------|
| <b>Diameter, nominal</b> | 1.8 m   6 ft |
|--------------------------|--------------|

## Electrical Specifications

|   |  |
|---|--|
| <b>Operating Frequency Band</b>                         | 5.925 – 7.125 GHz  |
| <b>Gain, Low Band</b>                                   | 38.3 dBi   |
| <b>Gain, Mid Band</b>                                   | 38.8 dBi   |
| <b>Gain, Top Band</b>                                   | 39.3 dBi   |
| <b>Boresite Cross Polarization Discrimination (XPD)</b> | 40 dB  |
| <b>Front-to-Back Ratio</b>                              | 76 dB  |
| <b>Beamwidth, Horizontal</b>                            | 1.8 °  |
| <b>Beamwidth, Vertical</b>                              | 1.8 °  |
| <b>Return Loss</b>                                      | 26 dB  |
| <b>VSWR</b>   | 1.1  |
| <b>Radiation Pattern Envelope Reference (RPE)</b>       | 7373   |
| <b>Electrical Compliance</b>                            | ACMA FX03_6b, 6p7b   ETSI 302 217 Class 4   IC 3059A   IC 3064A   US FCC Part 101A |

# USX6-6W

---

## Cross Polarization Discrimination (XPD) Electrical Compliance

ETSI EN 302217 XPD Category 3

## Electrical Specifications, Band 2

### Operating Frequency Band

5.725 – 5.850 GHz

### Gain, Mid Band

37.9 dBi

### Beamwidth, Horizontal

2°

### Beamwidth, Vertical

2°

## Mechanical Specifications

### Compatible Mounting Pipe Diameter

115 mm–120 mm | 4.5 in–4.7 in

### Fine Azimuth Adjustment Range

±15°

### Fine Elevation Adjustment Range

±5°

### Wind Speed, operational

200 km/h | 124.274 mph


### Wind Speed, survival

200 km/h | 124.274 mph

# USX6-6W

## Antenna Dimensions and Mounting Information

USX6

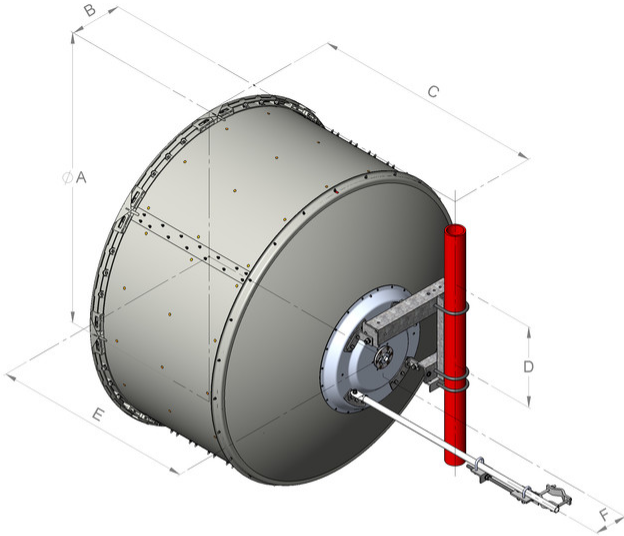

| Antenna size, ft<br>(m) | Dimensions in inches (mm) |               |                |               |                |              |
|-------------------------|---------------------------|---------------|----------------|---------------|----------------|--------------|
|                         | A                         | B             | C              | D             | E              | F            |
| 6<br>(1.8)              | 74.8<br>(1899)            | 13.4<br>(340) | 59.8<br>(1520) | 20.9<br>(530) | 51.8<br>(1315) | 8.4<br>(214) |

## Wind Forces at Wind Velocity Survival Rating

### Axial Force (FA)

6960 N | 1,564.671 lbf

### Angle $\alpha$ for MT Max

-130 °

### Side Force (FS)

2049 N | 460.634 lbf

### Twisting Moment (MT)

4948 N-m | 43,793.488 in lb

### Force on Inboard Strut Side

6187 N | 1,390.893 lbf

### Zcg without Ice

498 mm | 19.606 in

### Zcg with 1/2 in (12 mm) Radial Ice

689 mm | 27.126 in

### Weight with 1/2 in (12 mm) Radial Ice

291 kg | 641.544 lb


# USX6-6W

---



# USX6-6W

## Wind Forces at Wind Velocity Survival Rating Image

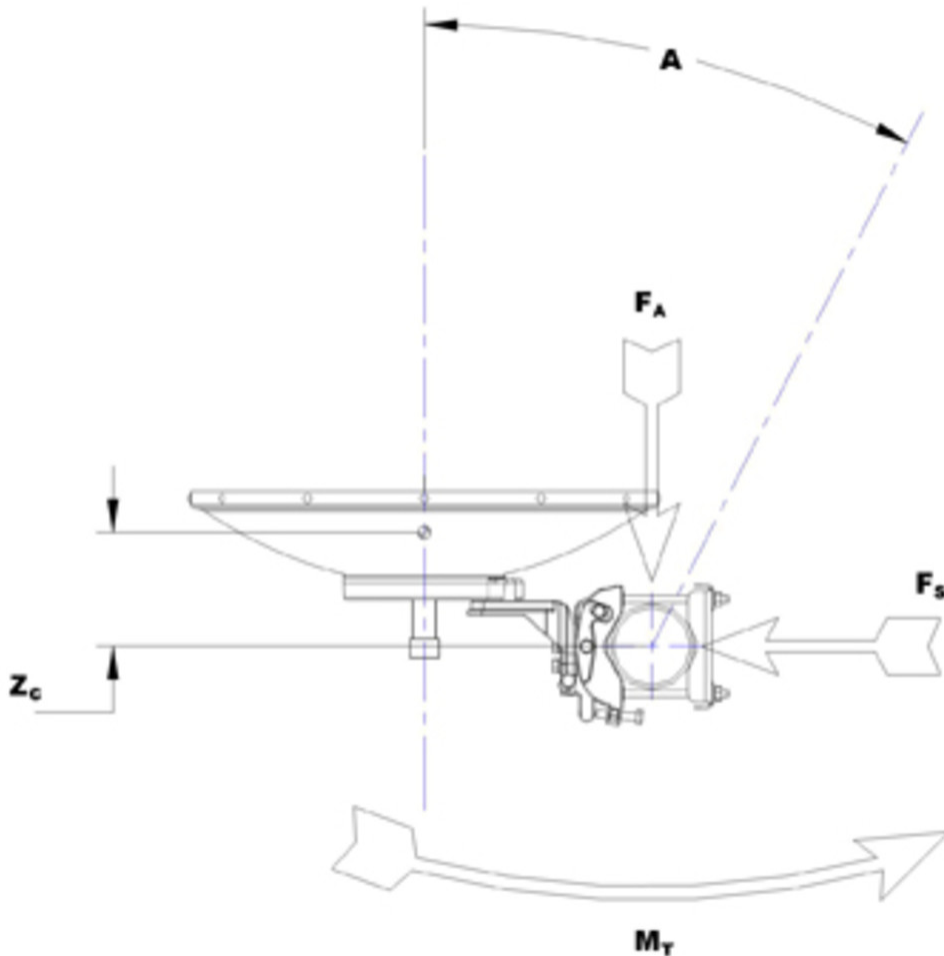

## Packaging and Weights

**Weight, net**

90 kg | 198.416 lb

## Regulatory Compliance/Certifications

**Agency**

**Classification**

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

## \* Footnotes

**Operating Frequency Band**

Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order.

# USX6-6W

---

## **Gain, Mid Band**

For a given frequency band, gain is primarily a function of antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the measured antenna patterns.

## **Boresite Cross Polarization Discrimination (XPD)**

The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

## **Front-to-Back Ratio**

Denotes highest radiation relative to the main beam, at  $180^\circ \pm 40^\circ$ , across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.

## **Return Loss**

The figure that indicates the proportion of radio waves incident upon the antenna that are rejected as a ratio of those that are accepted.

## **VSWR**

Maximum; is the guaranteed Peak Voltage-Standing-Wave-Ratio within the operating band.

## **Radiation Pattern Envelope Reference (RPE)**

Radiation patterns define an antenna's ability to discriminate against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular accuracy of  $\pm 1^\circ$  throughout

## **Cross Polarization Discrimination (XPD) Electrical Compliance**

The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

## **Wind Speed, operational**

For VHLP(X), SHP(X), HX and USX antennas, the wind speed where the maximum antenna deflection is 0.3 x the 3 dB beam width of the antenna. For other antennas, it is defined as a deflection is equal to or less than 0.1 degrees.

## **Wind Speed, survival**

The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice.

## **Axial Force (FA)**

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

## **Side Force (FS)**

Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this

parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

## **Twisting Moment (MT)**