


# EGVV65A-FL-C3-4XR



8-port sector antenna, 2x 694–862, 2x 880–960 and 4x 1695–2690 MHz, 65° HPBW, 4x RET. Low band arrays are diplexed at the element level.

- All Internal RET actuators are connected in “Cascaded SRET” configuration
- Uses the 4.3-10 connector which is 40 percent smaller than the 7-16 DIN connector

## General Specifications

<b>Antenna Type</b>	Sector
<b>Band</b>	Multiband
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage   Wind loading figures are validated by wind tunnel measurements described in white paper WP-112534-EN
<b>Radome Material</b>	Fiberglass, UV resistant
<b>Radiator Material</b>	Aluminum   Low loss circuit board
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Female
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	4
<b>RF Connector Quantity, low band</b>	4
<b>RF Connector Quantity, total</b>	8

## Remote Electrical Tilt (RET) Information

<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	1 female   1 male
<b>Input Voltage</b>	10–30 Vdc
<b>Internal RET</b>	High band (2)   Low band (2)
<b>Power Consumption, idle state, maximum</b>	2 W
<b>Power Consumption, normal conditions, maximum</b>	13 W
<b>Protocol</b>	3GPP/AISG 2.0 (Single RET)


# EGVV65A-FL-C3-4XR

## Dimensions

<b>Width</b>	301 mm   11.85 in
<b>Depth</b>	180.5 mm   7.106 in
<b>Length</b>	1,416.5 mm   55.768 in
<b>Net Weight, without mounting kit</b>	23.9 kg   52.69 lb

## Array Layout

EGVV65A-FL-C3-4XR, B & C

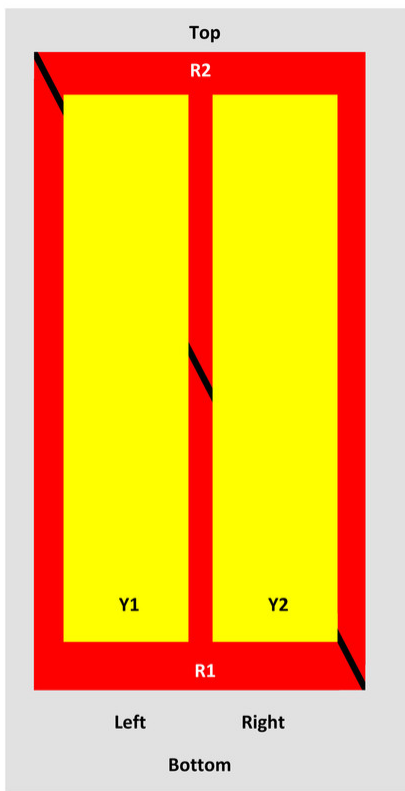

Array	Freq (MHz)	Conns	RET (SRET)	AISG RET UID
R1	694-862	1-2	1	ANXXXXXXXXXXXXX1
R2	880-960	3-4	2	ANXXXXXXXXXXXXX2
Y1	1695-2690	5-6	3	ANXXXXXXXXXXXXX3
Y2	1695-2690	7-8	4	ANXXXXXXXXXXXXX4

View from the front of the antenna

(Sizes of colored boxes are not true depictions of array sizes)

## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1695 – 2690 MHz   694 – 862 MHz   880 – 960 MHz
<b>Polarization</b>	±45°

# EGVV65A-FL-C3-4XR

Total Input Power, maximum

800 W @ 50 °C

## Electrical Specifications

Frequency Band, MHz	694–862	880–960	1695–1920	1920–2180	2300–2500	2500–2690
Gain, dBi	13.4	13.8	16.8	17.6	18	17.9
Beamwidth, Horizontal, degrees	70	67	64	65	61	60
Beamwidth, Vertical, degrees	16.5	13.8	7.2	6.4	5.5	5.2
Beam Tilt, degrees	2–17	2–17	2–12	2–12	2–12	2–12
USLS (First Lobe), dB	16	16	19	18	17	17
Front-to-Back Ratio at 180°, dB	27	28	28	31	31	30
Isolation, Cross Polarization, dB	28	28	28	28	28	28
Isolation, Inter-band, dB	30	30	30	30	30	30
VSWR   Return loss, dB	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0	1.5   14.0
PIM, 3rd Order, 2 x 20 W, dBc	-150	-150	-150	-150	-150	-150
Input Power per Port at 50°C, maximum, watts	200	200	250	250	250	200

## Electrical Specifications, BASTA

Frequency Band, MHz	694–862	880–960	1695–1920	1920–2180	2300–2500	2500–2690
Gain by all Beam Tilts, average, dBi	13	13.5	16.3	17.3	17.7	17.6
Gain by all Beam Tilts Tolerance, dB	±0.4	±0.4	±0.8	±0.5	±0.5	±0.5
Gain by Beam Tilt, average, dBi	2°   12.7 10°   13.1 17°   12.9	2°   13.1 10°   13.7 17°   13.4	2°   16.3 7°   16.5 12°   16.1	2°   17.1 7°   17.4 12°   17.0	2°   17.7 7°   17.9 12°   17.2	2°   17.5 7°   17.8 12°   17.2
Beamwidth, Horizontal Tolerance, degrees	±2.1	±3.5	±5.6	±6.2	±5.2	±4.6
Beamwidth, Vertical Tolerance, degrees	±1.9	±1	±0.6	±0.5	±0.3	±0.2
USLS, beampeak to 20° above beampeak, dB	19	16	11	14	12	12
Front-to-Back Total Power at 180° ± 30°, dB	22	21	21	24	25	22
CPR at Boresight, dB	22	19	15	17	17	18
CPR at Sector, dB	10	11	9	11	8	9

# EGVV65A-FL-C3-4XR

---

## Mechanical Specifications

<b>Wind Loading @ Velocity, frontal</b>	206.0 N @ 150 km/h (46.3 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	170.0 N @ 150 km/h (38.2 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, maximum</b>	397.0 N @ 150 km/h (89.2 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	209.0 N @ 150 km/h (47.0 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

<b>Width, packed</b>	429 mm   16.89 in
<b>Depth, packed</b>	329 mm   12.953 in
<b>Length, packed</b>	1672 mm   65.827 in
<b>Weight, gross</b>	35.9 kg   79.146 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

- BSAMNT-3 – Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

## \* Footnotes

**Performance Note** Severe environmental conditions may degrade optimum performance

# BSAMNT-3



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

## Product Classification

**Product Type** Downtilt mounting kit

## General Specifications

**Application** Outdoor

**Color** Silver

## Dimensions

**Compatible Diameter, maximum** 115 mm | 4.528 in

**Compatible Diameter, minimum** 60 mm | 2.362 in

**Weight, net** 6.2 kg | 13.669 lb

## Material Specifications

**Material Type** Galvanized steel

## Packaging and Weights

**Included** Brackets | Hardware

**Packaging quantity** 1

**Weight, gross** 6.4 kg | 14.11 lb

## Regulatory Compliance/Certifications

Agency	Classification
CE	Compliant with the relevant CE product directives
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

# BSAMNT-3

---

