

# Single Triplexer 700-800//900//1800-2600 MHz, DC Bypass on mid ports

- Industry leading PIM performance
- Designed for network modernization application, introduction of LTE700 and LTE800 on existing site
- dc/AISG pass-through on middle frequency ports

#### **OBSOLETE**

This product was discontinued on: July 1, 2022

Replaced By:

E14F10P07 Single Triplexer 700-800//900//1800-2600 MHz, DC Bypass on all ports, with 4.3-10 connectors

### Product Classification

Product Type Triplexer

General Specifications

**Product Family** CBC7926

ColorGrayCommon Port LabelCOM

**Modularity** 1-Single

Mounting Pole | Wall

Mounting Pipe HardwareBand clamps (2)RF Connector Interface7-16 DIN Female

RF Connector Interface Body Style Medium neck

Dimensions

 Height
 257 mm | 10.118 in


 Width
 251 mm | 9.882 in

 Depth
 63.5 mm | 2.5 in

**Mounting Pipe Diameter Range** 42.6–122 mm



## Outline Drawing

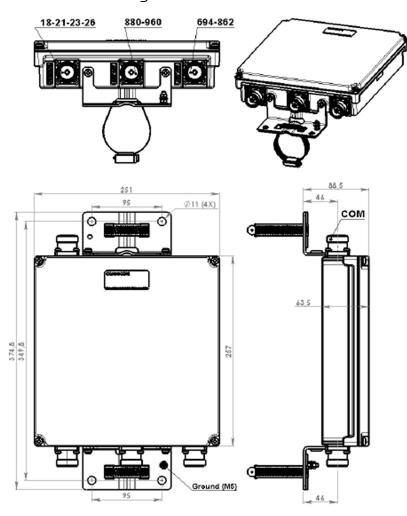

### **Electrical Specifications**

**Impedance** 50 ohm

**License Band, Band Pass**APT 700 | AWS 1700 | CEL 900 | DCS 1800 | IMT 2100 | IMT 2600 | LMR

750 | PCS 1900 | USA 700 | USA 750

### Electrical Specifications, dc Power/Alarm

dc/AISG Pass-through, combinerBranch 2dc/AISG Pass-through, demultiplexerBranch 2Lightning Surge Current5 kA

**Lightning Surge Current Waveform** 8/20 waveform

**COMMSCOPE®** 


## **Electrical Specifications**

Sub-module	1   2	1   2	1   2
Branch	1	2	3
Port Designation	DD2-800	900	18-21-23-26
License Band	APT 700, Band Pass EDD 800, Band Pass LMR 750, Band Pass USA 700, Band Pass USA 750, Band Pass	CEL 900, Band Pass	AWS 1700, Band Pass DCS 1800, Band Pass IMT 2100, Band Pass IMT 2600, Band Pass PCS 1900, Band Pass

## Electrical Specifications, Band Pass

Frequency Range, MHz	694-862	880-960	1710-2690
Insertion Loss, typical, dB	0.35	0.3	0.35
Return Loss, minimum, dB	18	18	18
Return Loss, typical, dB	22	22	22
Isolation, minimum, dB	50	50	50
Input Power, RMS, maximum, W	300	300	300
Input Power, PEP, maximum, W	3000	3000	3000
3rd Order PIM, typical, dBc	-160	-160	-160
3rd Order PIM Test Method	Two +43 dBm carriers	Two +43 dBm carriers	Two +43 dBm carriers

## Block Diagram

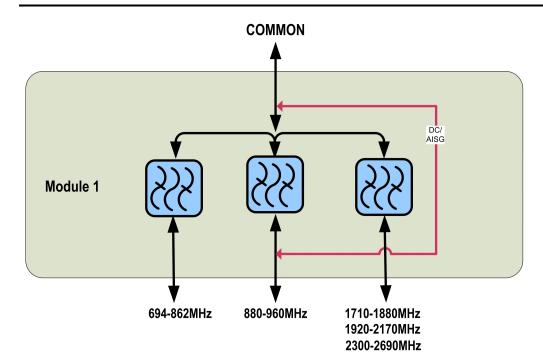

### **Environmental Specifications**

**Operating Temperature**  $-40 \, ^{\circ}\text{C} \text{ to } +60 \, ^{\circ}\text{C} \text{ (-40 } ^{\circ}\text{F to } +140 \, ^{\circ}\text{F)}$ 

**Relative Humidity** Up to 100%

**Corrosion Test Method** IEC 60068-2-11, 30 days

Ingress Protection Test Method IEC 60529:2001, IP67

Packaging and Weights

**Included** Mounting hardware

Volume 4.1 L

**Weight, net** 4.6 kg | 10.141 lb

### Regulatory Compliance/Certifications

#### Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system



