


# E15R30P05

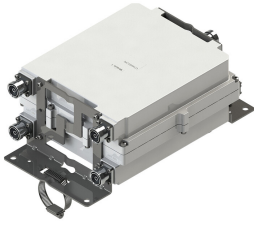

Dual Band Tower Mounted Amplifier, 800/900 MHz, 12 dB, 2 BTS & 4 ANT ports, AISG with 1 RET connector (2 device with 2 sub-units)

- Designed to boost UP-Link Coverage and KPIs
- TMA is operating in AISG & CWA mode, Alarm Current consumption CWA mode 190 mA
- 2 input ports and 4 output ports
- 2 devices with 2 sub-units
- Single AISG with 1 RET connector

## OBSOLETE

This product was discontinued on: July 1, 2022

### Replaced By:

E16R30P05

Dual Band Tower Mounted Amplifier, 800/900 MHz, 12 dB, 2 BTS & 4 ANT ports, AISG with 1 RET connector, with 4.3-10 connectors (2 device with 2 sub-units)

## Product Classification

**Product Type** 1-BTS:2-ANT (Diplex) | Tower mounted amplifier

## General Specifications


**Color** Gray  
**Modularity** 2-Twin  
**Mounting Pipe Hardware** Band clamps (2)  
**RF Connector Interface** 7-16 DIN Female

## Dimensions

**Height** 250 mm | 9.843 in  
**Width** 278 mm | 10.945 in  
**Depth** 128 mm | 5.039 in  
**Mounting Pipe Diameter Range** 42.6–122 mm

## Outline Drawing

# E15R30P05

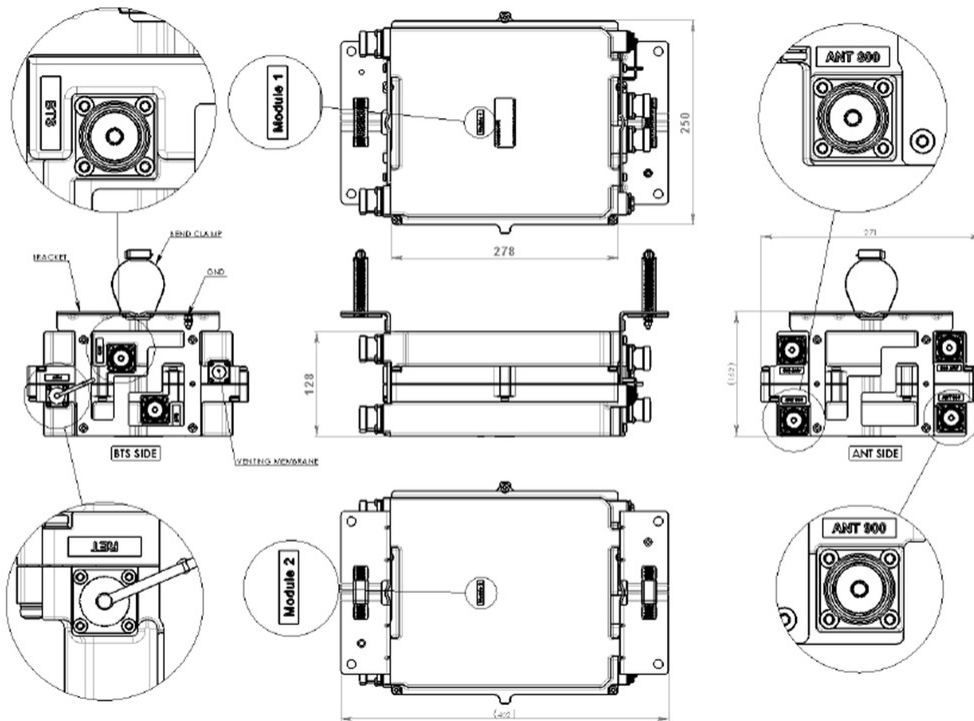

## Electrical Specifications

**License Band, LNA** CEL 900 | EDD 800

## Electrical Specifications, dc Power/Alarm

<b>dc Switching/Redundancy</b>	Yes
<b>Lightning Surge Current</b>	10 kA
<b>Lightning Surge Current Waveform</b>	8/20 waveform
<b>Voltage</b>	7–30 Vdc
<b>Alarm Current, CWA Mode</b>	190 mA ±10 mA

## Electrical Specifications, AISG

<b>AISG Connector</b>	8-pin DIN Female
<b>AISG Connector Standard</b>	IEC 60130-9
<b>Protocol</b>	AISG 2.0
<b>Voltage, AISG Mode</b>	10–30 Vdc

## Electrical Specifications

<b>Sub-module</b>	1   2	1   2
-------------------	-------	-------

# E15R30P05

---

<b>Branch</b>	1	2
<b>Port Designation</b>	ANT 800	ANT 900
<b>License Band</b>	EDD 800, LNA	CEL 900, LNA
<b>Return Loss, typical, dB</b>	20	20

## Electrical Specifications Rx (Uplink)


<b>Frequency Range, MHz</b>	<b>832–862</b>	<b>880–915</b>
<b>Bandwidth, MHz</b>	30	35
<b>Gain, nominal, dB</b>	12	12
<b>Noise Figure, typical, dB</b>	1.25	1.25
<b>Group Delay Variation, maximum, ns</b>	165	165
<b>Group Delay Variation Bandwidth, MHz</b>	5	5
<b>Total Group Delay, maximum, ns</b>	240	240
<b>Return Loss, minimum, dB</b>	16	18
<b>Insertion Loss - Bypass Mode, typical, dB</b>	2.7	2.7

## Electrical Specifications Tx (Downlink)

<b>Frequency Range, MHz</b>	<b>791–821</b>	<b>925–960</b>
<b>Bandwidth, MHz</b>	30	35
<b>Insertion Loss, typical, dB</b>	0.75	0.75
<b>Group Delay Variation, maximum, ns</b>	60	65
<b>Group Delay Variation Bandwidth, MHz</b>	5	5
<b>Total Group Delay, maximum, ns</b>	110	110
<b>Return Loss, minimum, dB</b>	18	18
<b>Return Loss, typical, dB</b>	20	20
<b>Input Power, RMS, maximum, W</b>	200	200
<b>Input Power, PEP, maximum, W</b>	2000	2000
<b>3rd Order PIM, typical, dBc</b>	-156	-156
<b>3rd Order PIM Test Method</b>	Two +43 dBm carriers	Two +43 dBm carriers

## Block Diagram

# E15R30P05

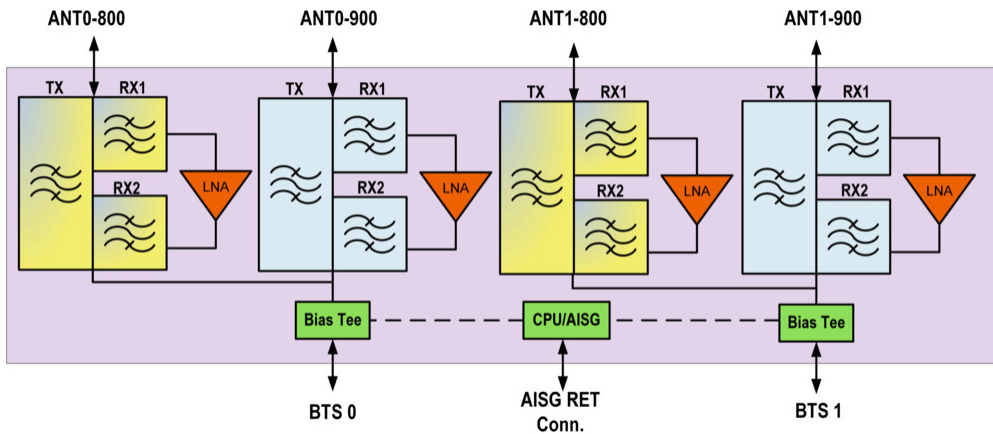

## Environmental Specifications

<b>Operating Temperature</b>	-40 °C to +65 °C (-40 °F to +149 °F)
<b>Relative Humidity</b>	Up to 100%
<b>Corrosion Test Method</b>	IEC 60068-2-11, 30 days
<b>Ingress Protection Test Method</b>	IEC 60529:2001, IP67

## Packaging and Weights

<b>Included</b>	Mounting hardware
<b>Volume</b>	8.9 L
<b>Weight, net</b>	12.2 kg   26.896 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system



## \* Footnotes

<b>License Band, LNA</b>	License Bands that have RxUplink amplification
--------------------------	------------------------------------------------