


# E15S08P95



## Tower Mounted Amplifier, Dual UMTS 2100 with AISG

- Industry leading PIM performance
- TMA is operating in AISG & CWA mode, Alarm Current consumption CWA mode 190 mA
- 2 input ports and 2 output ports
- Designed to boost UP-Link Coverage and KPIs

### **OBSOLETE**

This product was discontinued on: **December 31, 2023**

#### Replaced By:

E14R00P07

Tower Mounted Amplifier, Dual UMTS 2100 with AISG, 4.3-10 connectors

## Product Classification

**Product Type** 1-BTS:1-ANT (Uniplex) | Tower mounted amplifier

## General Specifications

**Color** Gray

**Modularity** 2-Twin

**Mounting** Pole | Wall

**Mounting Pipe Hardware** Band clamps (2)

**RF Connector Interface** 7-16 DIN Female

**RF Connector Interface Body Style** Long neck

## Dimensions

**Height** 188 mm | 7.402 in

**Width** 170 mm | 6.693 in


**Depth** 50 mm | 1.969 in

**Ground Screw Diameter** 8 mm | 0.315 in

**Mounting Pipe Diameter Range** 40–160 mm

# E15S08P95

## Outline Drawing

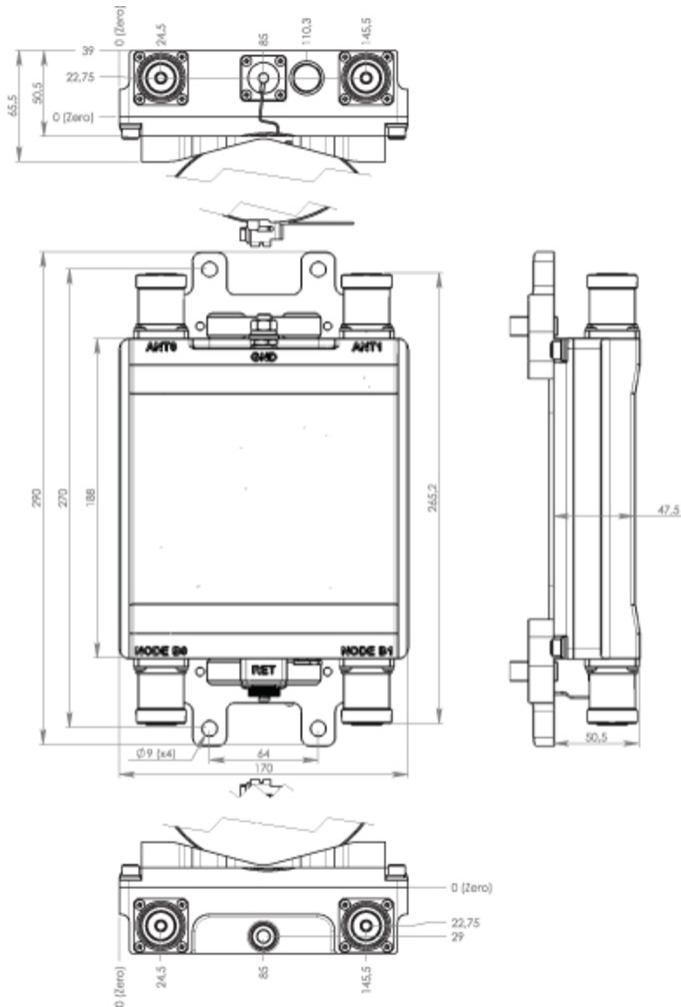

## Electrical Specifications

**License Band, LNA** IMT 2100

## Electrical Specifications, dc Power/Alarm

<b>dc Switching/Redundancy</b>	Yes
<b>Lightning Surge Current</b>	10 kA
<b>Lightning Surge Current Waveform</b>	8/20 waveform
<b>Operating Current at Voltage</b>	100 mA @ 12 V
<b>Operating Current Tolerance</b>	±15 mA
<b>Voltage</b>	7–30 Vdc

# E15S08P95

**Alarm Current, CWA Mode** 185 mA  $\pm$ 10 mA

## Electrical Specifications, AISG

**AISG Connector** 8-pin DIN Female  
**AISG Connector Standard** IEC 60130-9  
**Protocol** AISG 2.0  
**Voltage, AISG Mode** 10–30 Vdc

## Electrical Specifications

**Sub-module** 1 | 2  
**Branch** 1  
**Port Designation** ANT  
**License Band** IMT 2100, LNA  
**Return Loss - Bypass Mode, typical, dB** 19  
**TX Band Rejection, minimum, dB** 80

## Electrical Specifications Rx (Uplink)

**Frequency Range, MHz** 1920–1980  
**Bandwidth, MHz** 60  
**Gain, nominal, dB** 12  
**Gain Tolerance, dB**  $\pm$ 1  
**Noise Figure, maximum, dB** 1.4  
**Noise Figure, typical, dB** 1.2  
**Group Delay Variation, maximum, ns** 12  
**Group Delay Variation Bandwidth, MHz** 5  
**Total Group Delay, maximum, ns** 60  
**Output IP3, minimum, dBm** 24  
**Return Loss, minimum, dB** 18  
**Insertion Loss - Bypass Mode, typical, dB** 3.2

## Electrical Specifications Tx (Downlink)

**Frequency Range, MHz** 2110–2170

# E15S08P95

---

<b>Bandwidth, MHz</b>	60
<b>Insertion Loss, maximum, dB</b>	0.4
<b>Insertion Loss Ripple, maximum, dB</b>	0.1
<b>Group Delay Variation, maximum, ns</b>	3
<b>Group Delay Variation Bandwidth, MHz</b>	5
<b>Total Group Delay, maximum, ns</b>	18
<b>Return Loss, minimum, dB</b>	18
<b>RX Band Rejection, minimum, dB</b>	50
<b>Input Power, RMS, maximum, W</b>	160
<b>Input Power, PEP, maximum, W</b>	2500
<b>3rd Order PIM, typical, dBc</b>	-160



# E15S08P95

---

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system



## \* Footnotes

**License Band, LNA**

License Bands that have RxUplink amplification