


E15S09P49



Tower Mounted Amplifier, Twin Diplexed PCS/AWS TMA with 700–850 bypass and Variable Gain

OBSOLETE

This product was discontinued on: November 13, 2018

Replaced By:

TMAT1921B68-21-43 E14R00P09 Tower Mounted Amplifier, Twin Diplexed PCS/AWS 1–4, 555–894 MHz bypass 4.3-10

Product Classification

Product Type 1-BTS:2-ANT (Diplex) | Tower mounted amplifier

General Specifications


Color Gray
Modularity 2-Twin
Mounting Pipe Hardware Band clamps (2)
RF Connector Interface 7-16 DIN Female
RF Connector Interface Body Style Long neck

Dimensions

Height 255 mm | 10.039 in
Width 236 mm | 9.291 in
Depth 123 mm | 4.843 in
Ground Screw Diameter 6 mm | 0.236 in
Mounting Pipe Diameter Range 50–120 mm

E15S09P49

Outline Drawing

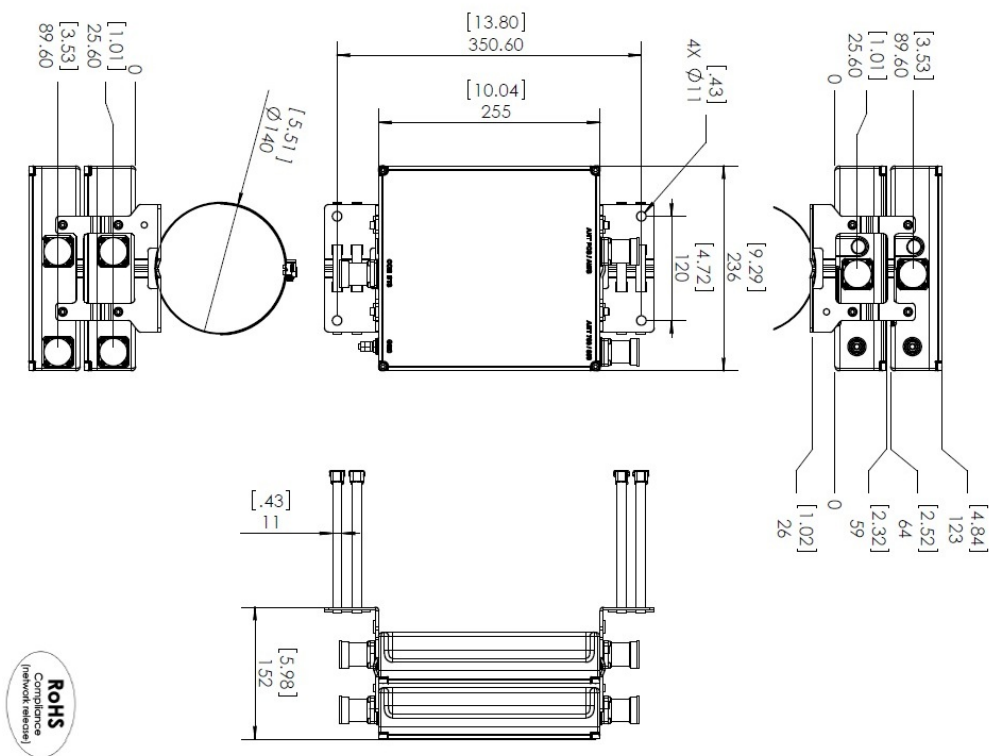

Electrical Specifications

License Band, Band Pass	APT 700 CEL 850 EDD 800 LMR 750 LMR 800 USA 700 USA 750
License Band, LNA	AWS 1700 PCS 1900

Electrical Specifications, dc Power/Alarm

dc Switching/Redundancy	No
Lightning Surge Current	5 kA
Lightning Surge Current Waveform	8/20 waveform
Operating Current at Voltage	105 mA @ 12 V 55 mA @ 24 V
Operating Current Tolerance	±15 mA
Voltage	7–30 Vdc
Voltage, CWA Mode	10–18 Vdc
Alarm Current, CWA Mode	180–200 mA @ 10–18 V

Electrical Specifications, AISG

E15S09P49

AISG Carrier	2.176 MHz ± 100 ppm
Default Protocol	AISG 2.0
Protocol	AISG 1.1 AISG 2.0
Voltage, AISG Mode	10–30 Vdc

Electrical Specifications

Sub-module	1 2	1 2	1 2
Branch	1	2	2
Port Designation	ANT 700	ANT PCS/AWS	ANT PCS/AWS
License Band	APT 700, Band Pass CEL 850, Band Pass EDD 800, Band Pass LMR 750, Band Pass LMR 800, Band Pass USA 700, Band Pass USA 750, Band Pass	AWS 1700, LNA	PCS 1900, Band Pass
Return Loss, typical, dB		24	24
Return Loss at 8 dB, typical, dB		22	22
Return Loss at 4 dB, typical, dB		18	18
Return Loss - Bypass Mode, typical, dB		16	16

Electrical Specifications Rx (Uplink)

	1710–1755	1850–1910
Frequency Range, MHz		
Bandwidth, MHz	45	60
Gain, nominal, dB	12	12
Gain Tolerance, dB	±1.0	±1.0
Gain Adjustment Range, dB	4–12	4–12
Gain Adjustment Range Increments, dB	1	1
Noise Figure, typical, dB	1.3	1.5
Noise Figure at 8 dB, typical, dB	1.6	1.8
Noise Figure at 4 dB, typical, dB	2.1	2.3
Total Group Delay, maximum, ns	50	130
Insertion Loss - Bypass Mode, typical, dB	1.9	2.9

Electrical Specifications Tx (Downlink)

	2110–2155	1930–1990
Frequency Range, MHz		
Bandwidth, MHz	45	60
Insertion Loss, maximum, dB	0.25	0.6


E15S09P49

Total Group Delay, maximum, ns	15	50
Return Loss, minimum, dB	20	20
Input Power, RMS, maximum, W	200	200
Input Power, PEP, maximum, W	3000	3000
3rd Order PIM, maximum, dBc		-153
3rd Order PIM Test Method		Two +43 dBm carriers

Electrical Specifications, Band Pass

Frequency Range, MHz	698-894
Insertion Loss, maximum, dB	0.3
Insertion Loss, typical, dB	0.2
Total Group Delay, maximum, ns	15
Return Loss, minimum, dB	20
Isolation, minimum, dB	40
Input Power, RMS, maximum, W	200
Input Power, PEP, maximum, W	3000
3rd Order PIM, maximum, dBc	-153
3rd Order PIM Test Method	Two +43 dBm carriers

Block Diagram

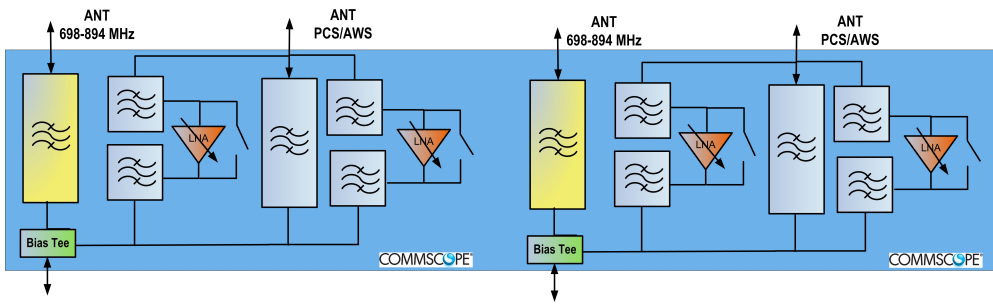

Material Specifications

Finish Painted

Mechanical Specifications

Wind Loading @ Velocity, maximum 60.0 N @ 115 km/h (13.5 lbf @ 115 km/h)

Wind Speed, maximum 241 km/h (150 mph)

Environmental Specifications

E15S09P49

Operating Temperature	-40 °C to +65 °C (-40 °F to +149 °F)
Relative Humidity	Up to 100%
Ingress Protection Test Method	IEC 60529:2001, IP67

Packaging and Weights

Included	Mounting hardware
Weight, net	10.2 kg 22.487 lb

* Footnotes

License Band, Band Pass	License Bands that are to be passed through with no amplification
License Band, LNA	License Bands that have RxUplink amplification