# UGGQXUCTK

#### **Base Product**



Ultra Low Loss (ULL) Singlemode MPO8 (Pinned) to unconnectorized, Fiber Trunk Cable Assembly, 72-Fiber, Plenum

#### **Product Classification**

Regional Availability

Asia | Australia/New Zealand | China | Europe | India | Latin

America | Middle East/Africa | North America

Portfolio CommScope®

 Product Type
 Fiber trunk cable assembly

 Product Brand
 Propel | SYSTIMAX ULL

Ordering Note For additional jacket colors, please contact a CommScope Sales Representative | For

lengths greater than 999 ft (304 m), orders must be in meters | Minimum length may

vary based on cable configuration

## General Specifications

Connector A, quantity 9

Color, boot AGrayColor, connector AGreenConnector B, quantity0

Construction Type Stranded
Furcation Color Yellow

Interface, Connector A MPO-08/APC Male

Interface, Connector B Unterminated

Jacket Color Yellow

Polarity Method B Enhanced (ULL)

Fibers per Subunit, quantity 8

Total Fibers, quantity 72

Dimensions

Breakout Length 22 in

Cable Assembly Length Range (m) 3 - 305


Cable Assembly Length Range (ft) 10 - 999

Page 1 of 3



## UGGQXUCTK

## Ordering Tree

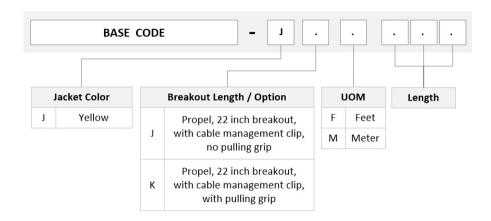

#### Mechanical Specifications

Cable Retention Strength, maximum 11.24 lb @ 0 ° | 4.40 lb @ 90 °

**Optical Specifications** 

**Fiber Mode** Singlemode

**Fiber Type** G.657.A2, TeraSPEED®

### **Environmental Specifications**

**Operating Temperature**  $-10 \,^{\circ}\text{C}$  to  $+60 \,^{\circ}\text{C}$  (+14  $^{\circ}\text{F}$  to +140  $^{\circ}\text{F}$ )

Environmental Space Indoor | Plenum

### Regulatory Compliance/Certifications

Agency Classification
ANATEL Compliant

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system



#### Included Products

760245567 – Fiber indoor cable, Plenum MPO Trunk, 72 fiber multi-unit with 8 fiber subunits, Singlemode G. P-072-MP-8G1-F08YL/20T 657.A2/B2, Feet jacket marking, Yellow jacket color

Page 2 of 3



860659022

MPO-08, ULTRA LOW LOSS, MALE, Singlemode, GREEN, 2mm

