PPLUGGRSNRPU



Propel ULL Singlemode Cabled Module, 4x16 duplex SN Propel module on End A to 4x16 on End B, 64 fiber Plenum Trunk, Method B Enhanced

- This component requires 4 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method B Enhanced polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio SYSTIMAX®

Product Type Fiber cabled module

Product Brand Propel
Product Series PPL

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Maximum length is

400 meters

General Specifications

Configuration Type PROPEL Module to MPO Connector

Cable Color Yellow

Cable Type Trunk Cable - Plenum

Interface, front SN/UPC

Interface Feature, front Duplex | Shuttered

Interface Color, front Blue

Interface, rear MPO-16/APC Female

Interface Feature, rear Key up/up | Unpinned

Module Size, end A 16 fiber

Module Size, end B 16 fiber

Module Quantity, end A 4
Module Quantity, end B 4

Polarity Method B Enhanced (ULL)

Total Fibers, quantity 64

Total Ports, quantity, front 32

COMMSCOPE®

PPLUGGRSNRPU

Dimensions

 Height
 11 mm | 0.433 in


 Width
 131 mm | 5.157 in

 Depth
 170 mm | 6.693 in

Breakout Length, end B 12 in | 120 in | 33 in | 36 in | 48 in | 60 in | 72 in

Cable Assembly Length Range (m) 1 - 400 Cable Assembly Length Range (ft) 2 - 999

Ordering Tree

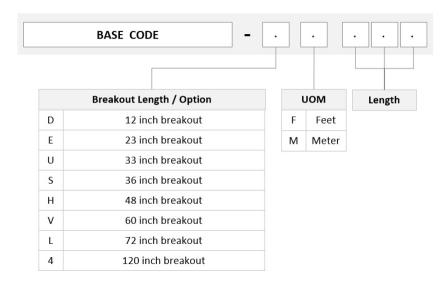

Optical Specifications

Fiber Mode Singlemode

Fiber Type OS2
Insertion Loss, maximum 0.6 dB

Environmental Specifications

Qualification Standards IEC 61753-1 | TIA-568.3-D

Safety Standard c-UL-us

Packaging and Weights

Packaging quantity 1

COMMSC PE°

PPLUGGRSNRPU

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted

UK-ROHS Compliant



Included Products

760251017 – Fiber indoor cable, Plenum MPO Trunk, 64 fiber multi-unit with 16 fiber subunits, Singlemode G. P-064-MP-8G1-F16YL 657.A2/B2, Feet jacket marking, Yellow jacket color

