PPLUGGRSNRXS



Propel ULL Singlemode Cabled Module, 2x16 duplex SN Propel module on End A to 2x16 on End B, 32 fiber Plenum Trunk, Method B Enhanced

- This component requires 4 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method B Enhanced polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

Product Classification

Regional Availability

Asia | Australia/New Zealand | EMEA | Latin America | North America

Portfolio SYSTIMAX®

Product Type Fiber cabled module

Product Brand Propel
Product Series PPL

Ordering Note For lengths greater than 999 ft (304 m), orders must be in meters | Maximum length is

400 meters

General Specifications

Configuration Type PROPEL Module to MPO Connector

Cable Color Yellow

Cable TypeTrunk Cable - Plenum

Interface, front SN/UPC

Interface Feature, front Duplex | Shuttered

Interface Color, front Blue

Interface, rear MPO-16/APC Male

Interface Feature, rear Key up/up | Pinned

Module Size, end A 16 fiber

Module Size, end B 16 fiber

Module Quantity, end A 2
Module Quantity, end B 2

Polarity Method B Enhanced (ULL)

Total Fibers, quantity 32

Total Ports, quantity, front 16

COMMSC PE®

PPLUGGRSNRXS

Dimensions

 Height
 11 mm | 0.433 in


 Width
 131 mm | 5.157 in

 Depth
 170 mm | 6.693 in

Breakout Length, end B 12 in | 120 in | 33 in | 36 in | 48 in | 60 in | 72 in

Cable Assembly Length Range (m) 1-400 Cable Assembly Length Range (ft) 2-999

Ordering Tree

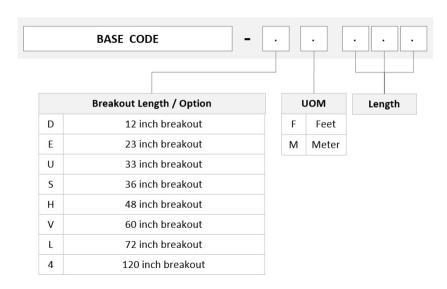

Optical Specifications

Fiber Mode Singlemode

Fiber Type OS2
Insertion Loss, maximum 0.6 dB

Environmental Specifications

Qualification Standards IEC 61753-1 | TIA-568.3-D

Safety Standard c-UL-us

Packaging and Weights

Packaging quantity 1

COMMSC PE®

PPLUGGRSNRXS

Regulatory Compliance/Certifications

Agency Classification

CHINA-ROHS Above maximum concentration value

ROHS Compliant/Exempted

UK-ROHS Compliant



Included Products

760251015 – Fiber indoor cable, Plenum MPO Trunk, 32 fiber with 16 fiber subunits,, Singlemode G.657.A2 P-032-MP-8G1-F16YL /B2 Feet jacket marking, Yellow jacket color

