

# PPLURVDLCLCD



Propel ULL Multimode OM5 Cabled Module, 1x12 duplex LC Propel module on End A to 1x12 on End B, 12 fiber LSZH Patchcord, Method B Enhanced

- This component requires 3 of the 12 lanes on the Propel Panel blade
- Ultra-low loss (ULL) with Method B Enhanced polarity
- End A module can be installed from rear of panel
- Serialized QR code provides easy access to factory optical test results

## Product Classification

|                              |   |
|------------------------------|---|
| <b>Regional Availability</b> | Asia   Australia/New Zealand   EMEA   Latin America   North America   |
| <b>Portfolio</b>             | SYSTIMAX®   |
| <b>Product Type</b>          | Fiber cabled module   |
| <b>Product Brand</b>         | Propel  |
| <b>Product Series</b>        | PPL   |
| <b>Ordering Note</b>         | End B module is the same module as End A   For lengths greater than 999 ft (304 m), orders must be in meters   Maximum length is 400 meters |

## General Specifications

|                                 |                                |
|---------------------------------|--------------------------------|
| <b>Configuration Type</b>       | PROPEL Module to PROPEL Module |
| <b>Cable Color</b>              | Lime green                     |
| <b>Cable Type</b>               | Patch cord LSZH                |
| <b>Interface, front</b>         | LC/UPC                         |
| <b>Interface Feature, front</b> | Duplex   Shuttered             |
| <b>Interface Color, front</b>   | Lime green                     |
| <b>Interface, rear</b>          | LC/UPC                         |
| <b>Interface Feature, rear</b>  | Duplex   Shuttered             |
| <b>Interface Color, rear</b>    | Lime green                     |
| <b>Module Size, end A</b>       | 12 fiber                       |
| <b>Module Size, end B</b>       | 12 fiber                       |
| <b>Module Quantity, end A</b>   | 1                              |
| <b>Module Quantity, end B</b>   | 1                              |
| <b>Polarity</b>                 | Method B Enhanced (ULL)        |

# PPLURVDLCLCD

|                                     |    |
|-------------------------------------|----|
| <b>Total Fibers, quantity</b>       | 12 |
| <b>Total Ports, quantity, front</b> | 6  |
| <b>Total Ports, quantity, rear</b>  | 6  |

## Dimensions

|   |                   |
|---|-------------------|
| <b>Height</b>                           | 11 mm   0.433 in  |
| <b>Width</b>                            | 98 mm   3.858 in  |
| <b>Depth</b>                            | 170 mm   6.693 in |
| <b>Breakout Length, end B</b>           | 23 in             |
| <b>Cable Assembly Length Range (m)</b>  | 1 – 400           |
| <b>Cable Assembly Length Range (ft)</b> | 2 – 999           |

## Ordering Tree



## Optical Specifications

|                                |           |
|--------------------------------|-----------|
| <b>Fiber Mode</b>              | Multimode |
| <b>Fiber Type</b>              | OM5       |
| <b>Insertion Loss, maximum</b> | 0.35 dB   |

## Environmental Specifications

|                                |                           |
|--------------------------------|---------------------------|
| <b>Qualification Standards</b> | IEC 61753-1   TIA-568.3-D |
| <b>Safety Standard</b>         | c-UL-us                   |

## Packaging and Weights

|                           |   |
|---------------------------|---|
| <b>Packaging quantity</b> | 1 |
|---------------------------|---|

## Regulatory Compliance/Certifications

# PPLURVDLCLCD

---

| Agency     | Classification                    |
|------------|-----------------------------------|
| CHINA-ROHS | Above maximum concentration value |
| ROHS       | Compliant/Exempted                |
| UK-ROHS    | Compliant                         |



## Included Products

|                                  |   |   |
|----------------------------------|---|---|
| 760238984<br>N-012-MP-5G-F20LM/E | - | LazrSPEED® Low Smoke Zero Halogen Riser Light Duty Interconnect Cable, 12 fiber |
|----------------------------------|---|---|



LazrSPEED® Low Smoke Zero Halogen Riser Light Duty Interconnect Cable, 12 fiber

## Product Classification

|                              |   |
|------------------------------|---|
| <b>Regional Availability</b> | Asia   Australia/New Zealand   EMEA   Latin America   North America |
| <b>Portfolio</b>             | CommScope®  |
| <b>Product Type</b>          | Fiber indoor cable  |
| <b>Product Series</b>        | N-MP  |


## General Specifications

|                          |                 |
|--------------------------|-----------------|
| <b>Cable Type</b>        | MPO trunk cable |
| <b>Construction Type</b> | Non-armored     |
| <b>Subunit Type</b>      | Gel-free        |
| <b>Jacket Color</b>      | Lime green      |
| <b>Jacket Marking</b>    | Feet            |
| <b>Total Fiber Count</b> | 12              |

## Dimensions

|                            |                 |
|----------------------------|-----------------|
| <b>Diameter Over Armor</b> | 2 mm   0.079 in |
|----------------------------|-----------------|

## Representative Image

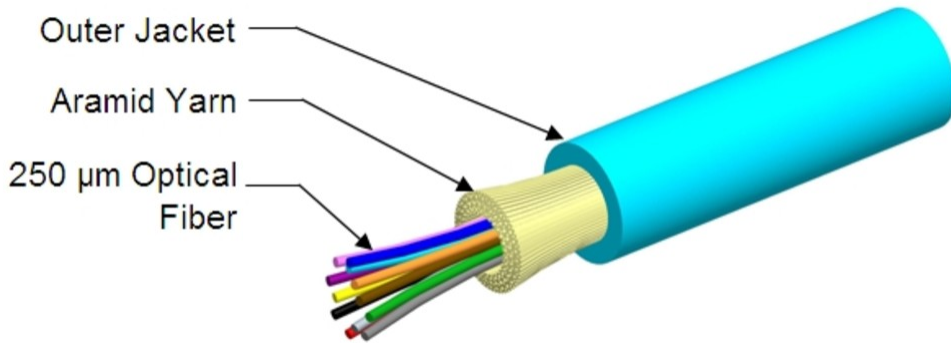

## Mechanical Specifications

|  |                                       |
|--|---------------------------------------|
| <b>Minimum Bend Radius, loaded</b>       | 38 mm   1.496 in                      |
| <b>Minimum Bend Radius, unloaded</b>     | 16 mm   0.63 in                       |
| <b>Tensile Load, long term, maximum</b>  | 33 N   7.419 lbf                      |
| <b>Tensile Load, short term, maximum</b> | 111 N   24.954 lbf                    |
| <b>Compression</b>                       | 4 N/mm   22.841 lb/in                 |
| <b>Compression Test Method</b>           | FOTP-41   IEC 60794-1 E3              |
| <b>Flex</b>                              | 300 cycles                            |
| <b>Flex Test Method</b>                  | FOTP-104   IEC 60794-1 E6             |
| <b>Impact</b>                            | 0.74 N-m   6.55 in lb                 |
| <b>Impact Test Method</b>                | FOTP-25   IEC 60794-1 E4              |
| <b>Strain</b>                            | See long and short term tensile loads |
| <b>Strain Test Method</b>                | FOTP-33   IEC 60794-1 E1              |
| <b>Twist</b>                             | 10 cycles                             |
| <b>Twist Test Method</b>                 | FOTP-85   IEC 60794-1 E7              |
| <b>Vertical Rise, maximum</b>            | 500 m   1,640.42 ft                   |

## Optical Specifications

|                   |   |
|-------------------|---|
| <b>Fiber Type</b> | OM5, LazrSPEED® wideband   OM5, LazrSPEED® wideband |
|-------------------|---|

## Environmental Specifications

|                                 |                                    |
|---------------------------------|------------------------------------|
| <b>Installation temperature</b> | 0 °C to +60 °C (+32 °F to +140 °F) |
| <b>Operating Temperature</b>    | 0 °C to +70 °C (+32 °F to +158 °F) |

# 760238984 | N-012-MP-5G-F20LM/E

|   |   |
|---|---|
| <b>Storage Temperature</b>                          | -40 °C to +70 °C (-40 °F to +158 °F)                        |
| <b>Cable Qualification Standards</b>                | ANSI/ICEA S-83-596   Telcordia GR-409                       |
| <b>EN50575 CPR Cable EuroClass Fire Performance</b> | Eca   |
| <b>Environmental Space</b>                          | Low Smoke Zero Halogen (LSZH)   Riser                       |
| <b>Flame Test Listing</b>                           | NEC OFNR-ST1 (ETL) and c(ETL)                               |
| <b>Flame Test Method</b>                            | IEC 60332-3   IEC 60754-2   IEC 61034-2   UL 1666   UL 1685 |

## Environmental Test Specifications

|                                      |                                    |
|--------------------------------------|------------------------------------|
| <b>Heat Age</b>                      | 0 °C to +85 °C (+32 °F to +185 °F) |
| <b>Heat Age Test Method</b>          | IEC 60794-1 F9                     |
| <b>Low High Bend</b>                 | 0 °C to +70 °C (+32 °F to +158 °F) |
| <b>Low High Bend Test Method</b>     | FOTP-37   IEC 60794-1 E11          |
| <b>Temperature Cycle</b>             | 0 °C to +70 °C (+32 °F to +158 °F) |
| <b>Temperature Cycle Test Method</b> | FOTP-3   IEC 60794-1 F1            |

## Packaging and Weights

|                     |                          |
|---------------------|--------------------------|
| <b>Cable weight</b> | 3.7 kg/km   2.486 lb/kft |
|---------------------|--------------------------|

## Regulatory Compliance/Certifications

| <b>Agency</b> | <b>Classification</b>  |
|---------------|--|
| CENELEC       | EN 50575 compliant, Declaration of Performance (DoP) available   |
| CHINA-ROHS    | Below maximum concentration value  |
| ISO 9001:2015 | Designed, manufactured and/or distributed under this quality management system   |
| REACH-SVHC    | Compliant as per SVHC revision on <a href="http://www.commscope.com/ProductCompliance">www.commscope.com/ProductCompliance</a> |
| ROHS          | Compliant  |
| UK-ROHS       | Compliant  |



## \* Footnotes

**Operating Temperature** Specification applicable to non-terminated bulk fiber cable