Base Product



2.4m | 8ft Sentinel® Ultra High Performance, Super High XPD Antenna, dual-polarized, 10.000 – 11.700 GHz

Product Classification

Product Type Microwave antenna

General Specifications

Antenna Type USX - Sentinel® Ultra High Performance, Super

High XPD Antenna, dual-polarized

Polarization Dual

Side Struts, Included 1

Side Struts, Optional 4

Dimensions

Return Loss

Diameter, nominal 2.4 m | 8 ft

Electrical Specifications

Operating Frequency Band 10.000 - 11.700 GHz

Gain, Low Band45.4 dBiGain, Mid Band46 dBi

Gain, Top Band 46.6 dBi

Boresite Cross Polarization Discrimination (XPD) 40 dB

Front-to-Back Ratio 80 dB

Beamwidth, Horizontal $$0.9\ ^{\circ}$$

Beamwidth, Vertical $0.9~^{\circ}$

VSWR 1.1

Radiation Pattern Envelope Reference (RPE) 7398

Electrical Compliance ACMA FX03_10a | ACMA FX03_11a | ETSI 302

217 Class 4 | US FCC Part 105A | US FCC Part

107A

26 dB

Page 1 of 7

Cross Polarization Discrimination (XPD) Electrical Compliance ETSI EN 302217 XPD Category 3

Mechanical Specifications

Compatible Mounting Pipe Diameter 115 mm | 4.5 in

Fine Azimuth Adjustment Range ±5°

Fine Elevation Adjustment Range ±5°


 Wind Speed, operational
 201 km/h | 124.896 mph

 Wind Speed, survival
 200 km/h | 124.274 mph



Antenna Dimensions and Mounting Information

USX8

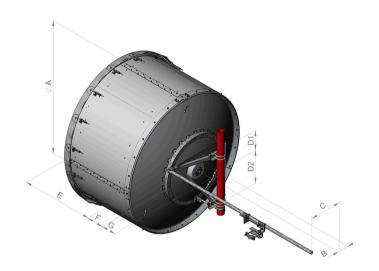

Dimensions in inches (mm)								
Antenna size, ft (m)	Α	В	С	D1	D2	Е	F	G
8 (2.4)	95.1 (2416)	8.0 (203)	22.5 (572)	14.1 (357)	23.6 (600)	51.1 (1298)	12.1 (306)	10.3 (262)

Wind Forces at Wind Velocity Survival Rating

Axial Force (FA)

Angle α for MT Max

Side Force (FS)

Twisting Moment (MT)

Force on Inboard Strut Side

Zcg without Ice

Zcg with 1/2 in (12 mm) Radial Ice

Weight with 1/2 in (12 mm) Radial Ice

10599 N | 2,382.751 lbf

-140°

6268 N | 1,409.103 lbf

-7647 N-m | -67,681.656 in lb

11263 N | 2,532.024 lbf

624 mm | 24.567 in


765 mm | 30.118 in

364 kg | 802.482 lb

Page 3 of 7



Wind Forces at Wind Velocity Survival Rating Image

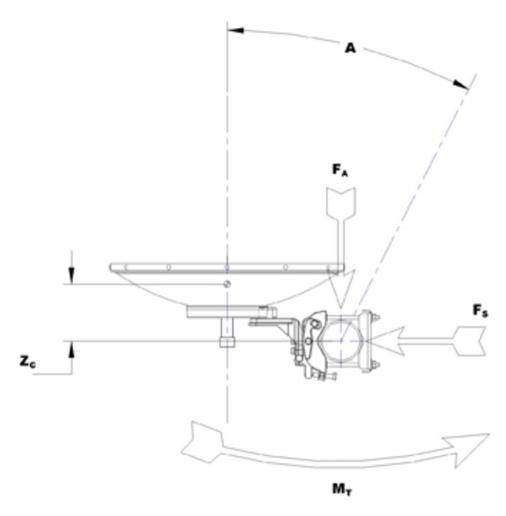

Packaging and Weights

Weight, net 196 kg | 432.106 lb

Regulatory Compliance/Certifications

Agency Classification

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

* Footnotes

Operating Frequency Band

Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order.

Page 5 of 7

Side Force (FS)

Gain, Mid Band For a given frequency band, gain is primarily a function of antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the measured antenna patterns. **Boresite Cross Polarization Discrimination (XPD)** The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam. Front-to-Back Ratio Denotes highest radiation relative to the main beam, at 180° ±40°, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise. **Return Loss** The figure that indicates the proportion of radio waves incident upon the antenna that are rejected as a ratio of those that are accepted. **VSWR** Maximum; is the guaranteed Peak Voltage-Standing-Wave-Ratio within the operating band. Radiation Pattern Envelope Reference (RPE) Radiation patterns define an antenna's ability to discriminate against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular accuracy of +/-1° throughout Cross Polarization Discrimination (XPD) Electrical Compliance The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam. For VHLP(X), SHP(X), HX and USX antennas, the wind speed Wind Speed, operational where the maximum antenna deflection is 0.3 x the 3 dB beam width of the antenna. For other antennas, it is defined as a deflection is equal to or less than 0.1 degrees. Wind Speed, survival The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice. Maximum forces exerted on a supporting structure as a Axial Force (FA) result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.



Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this

Twisting Moment (MT)

parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.

Page 7 of 7