

# RRZS4-65D-R5

16-port sector antenna, 4x 694–960, 4x 1427–2690 MHz, 65° HPBW and 8x 3300–3800 MHz, 90° HPBW, 5x RET



- Combination of Quad Band antenna and 3.5GHz 8T8R beam forming antenna
- Internal SBT RET support via Calibration Port of 3.5GHz array
- Beam-forming weighting table available upon request
- Optimized for Software Defined Split Six Sector applications on 3.5GHz
- Supports re-configurable antenna sharing capability enabling control of the internal RET system using up to two separate RET compatible OEM radios

## General Specifications

<b>Antenna Type</b>	Sector
<b>Band</b>	Multiband
<b>Calibration Connector Interface</b>	N Female
<b>Calibration Connector Quantity</b>	1
<b>Color</b>	Light Gray (RAL 7035)
<b>Grounding Type</b>	RF connector inner conductor and body grounded to reflector and mounting bracket
<b>Performance Note</b>	Outdoor usage   Wind loading figures are validated by wind tunnel measurements described in white paper WP-112534-EN
<b>Radome Material</b>	Fiberglass, UV resistant
<b>Radiator Material</b>	Low loss circuit board
<b>Reflector Material</b>	Aluminum
<b>RF Connector Interface</b>	4.3-10 Female
<b>RF Connector Location</b>	Bottom
<b>RF Connector Quantity, high band</b>	12
<b>RF Connector Quantity, mid band</b>	0
<b>RF Connector Quantity, low band</b>	4
<b>RF Connector Quantity, total</b>	16

## Remote Electrical Tilt (RET) Information

<b>RET Hardware</b>	CommRET v2
<b>RET Interface</b>	8-pin DIN Female   8-pin DIN Male
<b>RET Interface, quantity</b>	2 female   2 male


# RRZZS4-65D-R5

<b>Input Voltage</b>	10–30 Vdc
<b>Internal RET</b>	High band (3)   Low band (2)
<b>Power Consumption, idle state, maximum</b>	1 W
<b>Power Consumption, normal conditions, maximum</b>	8 W
<b>Protocol</b>	3GPP/AISG 2.0 (Single RET)

## Dimensions

<b>Width</b>	498 mm   19.606 in
<b>Depth</b>	197 mm   7.756 in
<b>Length</b>	2688 mm   105.827 in
<b>Net Weight, without mounting kit</b>	47 kg   103.617 lb
<b>TDD Column Spacing</b>	42 mm   1.654 in

## Array Layout

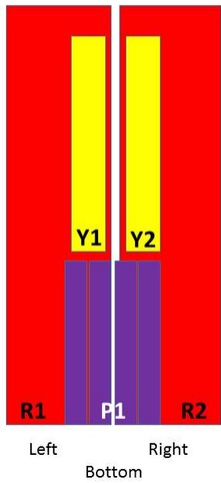


Array	Freq (MHz)	Conns	RET (SRET)	AISG RET UID
R1	694-960	1-2	1	CPxxxxxxxxxxxxxxxxR1
R2	695-960	3-4	2	CPxxxxxxxxxxxxxxxxR2
Y1	1427-2690	5-6	3	CPxxxxxxxxxxxxxxxxY1
Y2	1427-2690	7-8	4	CPxxxxxxxxxxxxxxxxY2
P1	3300-3800	9-16	5	CPxxxxxxxxxxxxxxxxP1

(Sizes of colored boxes are not true depictions of array sizes)

## Port Configuration

# RRZS4-65D-R5

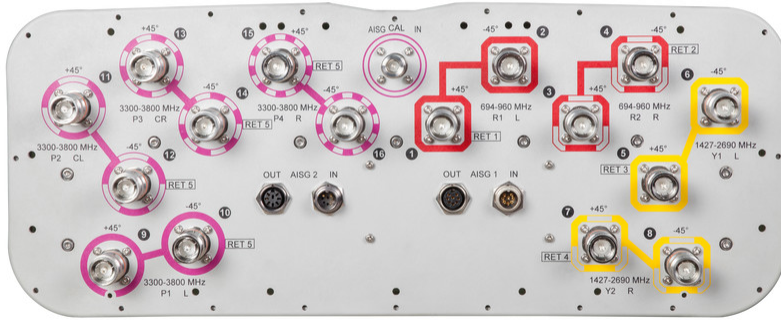

## Electrical Specifications

<b>Impedance</b>	50 ohm
<b>Operating Frequency Band</b>	1427 – 2690 MHz   3300 – 3800 MHz   694 – 960 MHz
<b>Polarization</b>	±45°
<b>Total Input Power, maximum</b>	900 W @ 50 °C

## Electrical Specifications

	R1-R2	R1-R2	R1-R2	Y1-Y2	Y1-Y2	Y1-Y2	Y1-Y2	P1
<b>Frequency Band, MHz</b>	<b>694–790</b>	<b>790–862</b>	<b>880–960</b>	<b>1427–1518</b>	<b>1695–1920</b>	<b>1920–2180</b>	<b>2300–2690</b>	<b>3300–3800</b>
<b>Gain, dBi</b>	15.9	16.3	16.8	15.3	17.1	17.6	17.7	16.5
<b>Beamwidth, Horizontal, degrees</b>	70	67	63	68	57	58	62	86
<b>Beamwidth, Vertical, degrees</b>	8.4	7.6	6.9	8.7	7.2	6.5	5.3	6.5
<b>Beam Tilt, degrees</b>	2–12	2–12	2–12	2–12	2–12	2–12	2–12	2–12
<b>USLS (First Lobe), dB</b>	14	17	19	17	18	17	17	16
<b>Front-to-Back Ratio at 180°, dB</b>	31	30	32	33	35	36	33	30
<b>Coupling level, Amp, Antenna port to Cal port, dB</b>								26
<b>Coupling level, max Amp Δ,</b>								±2

# RRZZS4-65D-R5

## Antenna port to Cal port, dB

**Coupler, max Amp  $\Delta$ , Antenna port to Cal port, dB** 1.8

**Coupler, max Phase  $\Delta$ , Antenna port to Cal port, degrees** 14

**Isolation, Cross Polarization, dB** 28 28 28 27 28 28 28 25

**Isolation, Inter-band, dB** 28 28 28 28 28 28 28 19

**VSWR | Return loss, dB** 1.5|14.0 1.5|14.0 1.5|14.0 1.5|14.0 1.5|14.0 1.5|14.0 1.5|14.0 1.5|14.0

**PIM, 3rd Order, 2 x 20 W, dBc** -150 -150 -150 -150 -150 -150 -150 -145

**Input Power per Port at 50°C, maximum, watts** 250 250 250 200 200 200 150 75

## Electrical Specifications, Broadcast 65°

**Frequency Band, MHz** 3300–3800

**Gain, dBi** 16.5

**Beamwidth, Horizontal, degrees** 62

**Beamwidth, Vertical, degrees** 6.5

**USLS (First Lobe), dB** 16

## Electrical Specifications, Service Beam

**Frequency Band, MHz** 3300–3800

**Steered 0° Gain, dBi** 20.9

**Steered 0° Beamwidth, Horizontal, degrees** 24

**Steered 0° Horizontal Sidelobe, dB** 13

**Steered 30° Gain, dBi** 19.5

**Steered 30° Beamwidth, Horizontal, degrees** 31

## Electrical Specifications, Soft Split

**Frequency Band, MHz** 3300–3800

**Gain, dBi** 19.8

**Beamwidth, Horizontal, degrees** 31

**Horizontal Sidelobe, dB** 18

# RRZZS4-65D-R5

---

## Mechanical Specifications

<b>Mechanical Tilt Range</b>	0°–10°
<b>Wind Loading @ Velocity, frontal</b>	1,070.0 N @ 150 km/h (240.5 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, lateral</b>	375.0 N @ 150 km/h (84.3 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, maximum</b>	1,385.0 N @ 150 km/h (311.4 lbf @ 150 km/h)
<b>Wind Loading @ Velocity, rear</b>	880.0 N @ 150 km/h (197.8 lbf @ 150 km/h)
<b>Wind Speed, maximum</b>	241 km/h (150 mph)

## Packaging and Weights

<b>Width, packed</b>	565 mm   22.244 in
<b>Depth, packed</b>	309 mm   12.165 in
<b>Length, packed</b>	2935 mm   115.551 in
<b>Weight, gross</b>	68 kg   149.914 lb

## Regulatory Compliance/Certifications

<b>Agency</b>	<b>Classification</b>
CHINA-ROHS	Above maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
ROHS	Compliant/Exempted
UK-ROHS	Compliant/Exempted



## Included Products

- |           |   |  |
|-----------|---|--|
| BSAMNT-4  | – | Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set. |
| BSAMNT-M4 | – | Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.                            |

## \* Footnotes

**Performance Note** Severe environmental conditions may degrade optimum performance

# BSAMNT-4



Wide Profile Antenna Downtilt Mounting Kit for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor top bracket set and one bottom bracket set.

## Product Classification

**Product Type** Downtilt mounting kit

## General Specifications

**Application** Outdoor

**Color** Silver

## Dimensions

**Compatible Diameter, maximum** 115 mm | 4.528 in

**Compatible Diameter, minimum** 60 mm | 2.362 in

**Weight, net** 6.5 kg | 14.33 lb

## Material Specifications

**Material Type** Galvanized steel

## Packaging and Weights

**Included** Brackets | Hardware

**Packaging quantity** 1

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant



# BSAMNT-M4



Middle Downtilt Mounting Kit for Long Antennas for 2.4 - 4.5 in (60 - 115 mm) OD round members. Kit contains one scissor bracket set.

## Product Classification

**Product Type** Downtilt mounting kit

## General Specifications

**Application** Outdoor

**Color** Silver

## Dimensions

**Compatible Diameter, maximum** 115 mm | 4.528 in

**Compatible Diameter, minimum** 60 mm | 2.362 in

**Weight, net** 4.6 kg | 10.141 lb

## Material Specifications

**Material Type** Galvanized steel

## Packaging and Weights

**Included** Brackets | Hardware

**Packaging quantity** 1

## Regulatory Compliance/Certifications

Agency	Classification
CHINA-ROHS	Below maximum concentration value
ISO 9001:2015	Designed, manufactured and/or distributed under this quality management system
REACH-SVHC	Compliant as per SVHC revision on <a href="http://www.andrew.com/ProductCompliance">www.andrew.com/ProductCompliance</a>
ROHS	Compliant
UK-ROHS	Compliant

