

2.4m | 8ft Sentinel® Ultra High Performance, Super High XPD Antenna, dual-polarized, 4.400 – 5.000 GHz, grey, PDR48 flange

Product Classification	
Product Type	Microwave antenna
Product Brand	Sentinel®
General Specifications	
Antenna Type	USX - Sentinel® Ultra High Performance, Super High XPD Antenna, dual-polarized
Polarization	Dual
Antenna Input	PDR48
Antenna Color	Gray
Reflector Construction	One-piece reflector
Radome Color	Gray
Radome Material	Fabric
Flash Included	No
Side Struts, Included	1
Side Struts, Optional	4
Dimensions	
Diameter, nominal	2.4 m   8 ft
Electrical Specifications	
Operating Frequency Band	4.400 - 5.000 GHz
Gain, Low Band	38 dBi
Gain, Mid Band	38.8 dBi
Gain, Top Band	39.3 dBi
Boresite Cross Polarization Discrimination (XPD)	40 dB
Front-to-Back Ratio	75 dB
Beamwidth, Horizontal	2°

Page 1 of 7




Beamwidth, Vertical	2°	
Return Loss	23 dB	
VSWR	1.15	
Radiation Pattern Envelope Reference (RPE)	7395	
Electrical Compliance	ETSI 302 217 Class 3	
Cross Polarization Discrimination (XPD) Electrical Compliance	ETSI EN 302217 XPD Category 3	
Mechanical Specifications		
Compatible Mounting Pipe Diameter	115 mm   4.5 in	
Fine Azimuth Adjustment Range	±5°	
Fine Elevation Adjustment Range	±5°	
Wind Speed, operational	180 km/h   111.847 mph	
Wind Speed, survival	200 km/h   124.274 mph	

Page 2 of 7



### Antenna Dimensions and Mounting Information

USX8

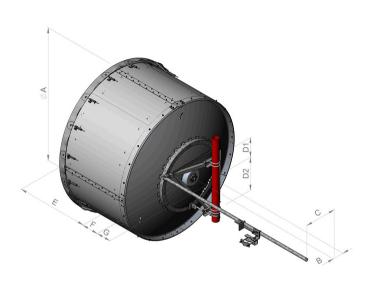

		Dime	nsions ir	inches	(mm)			
Antenna size, ft (m)	А	в	с	D1	D2	E	F	G
8 (2.4)	95.1 (2416)	8.0 (203)	22.5 (572)	14.1 (357)	23.6 (600)	51.1 (1298)	12.1 (306)	10.3 (262)

#### Wind Forces at Wind Velocity Survival Rating

Axial Force (FA)	10599 N   2,382.751 lbf
Angle α for MT Max	-140 °
Side Force (FS)	6268 N   1,409.103 lbf
Twisting Moment (MT)	-7647 N-m   -67,681.656 in lb
Force on Inboard Strut Side	11263 N   2,532.024 lbf
Zcg without Ice	624 mm   24.567 in
Zcg with 1/2 in (12 mm) Radial Ice	765 mm   30.118 in
Weight with 1/2 in (12 mm) Radial Ice	364 kg   802.482 lb

Page 3 of 7


©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: May 14, 2024

**COMMSCOPE**°

Page 4 of 7



Wind Forces at Wind Velocity Survival Rating Image

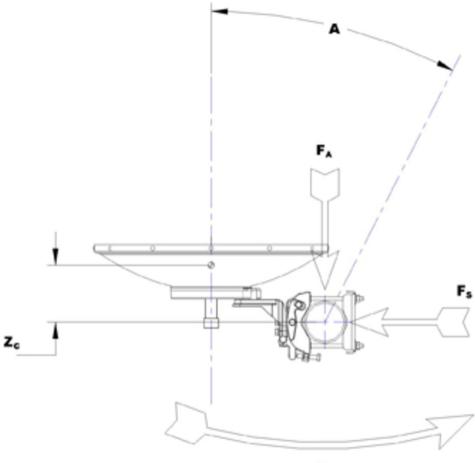

MT

Packaging and Weights Height, packed 2250 mm | 88.583 in Width, packed Length, packed **Packaging Type** Standard pack Volume 6.1 m<sup>3</sup> | 215.42 ft<sup>3</sup> Weight, gross 329 kg | 725.32 lb 196 kg | 432.106 lb Weight, net

#### Regulatory Compliance/Certifications

1130 mm | 44.488 in 2380 mm | 93.701 in

Page 5 of 7

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: May 14, 2024

**COMMSCOPE**<sup>®</sup>

Classification

Agency

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

\* Footnotes

Operating Frequency Band	Bands correspond with CCIR recommendations or common allocations used throughout the world. Other ranges can be accommodated on special order.
Gain, Mid Band	For a given frequency band, gain is primarily a function of antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the measured antenna patterns.
Boresite Cross Polarization Discrimination (XPD)	The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.
Front-to-Back Ratio	Denotes highest radiation relative to the main beam, at 180° ±40°, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.
Return Loss	The figure that indicates the proportion of radio waves incident upon the antenna that are rejected as a ratio of those that are accepted.
VSWR	Maximum; is the guaranteed Peak Voltage-Standing-Wave- Ratio within the operating band.
Radiation Pattern Envelope Reference (RPE)	Radiation patterns define an antenna's ability to discriminate against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular accuracy of +/-1° throughout
Cross Polarization Discrimination (XPD) Electrical Compliance	The difference between the peak of the co-polarized main beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.
Wind Speed, operational	For VHLP(X), SHP(X), HX and USX antennas, the wind speed where the maximum antenna deflection is $0.3 \times 10^{-3} \text{ dB}$ beam width of the antenna. For other antennas, it is defined as a deflection is equal to or less than 0.1 degrees.
Wind Speed, survival	The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice.

Page 6 of 7

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: May 14, 2024

**COMMSCOPE**°

Axial Force (FA)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Side Force (FS)	Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Twisting Moment (MT)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Packaging Type	Andrew standard packing is suitable for export. Antennas are shipped as standard in totally recyclable cardboard or wire- bound crates (dependent on product). For your convenience, Andrew offers heavy duty export packing options.

