

0.3 m | 1 ft Sentinel® High Performance Antenna, dual-polarized, 31.0–33.4 GHz, UBR flange, white antenna, grey radome

#### **Product Classification**

Product Type Microwave antenna

Product Brand Sentinel®

General Specifications

Antenna Type SHPX - Sentinel® High Performance Antenna, dual-

polarized

**Polarization** Dual

Antenna Input UBR320

Antenna Color White

**Reflector Construction** One-piece reflector

Radome Color Gray

Radome Material Polymer

Flash Included No

Side Struts, Included 0

Side Struts, Optional 0

**Dimensions** 

Diameter, nominal 0.3 m | 1 ft

**Electrical Specifications** 

Operating Frequency Band 31.000 – 33.400 GHz

Gain, Low Band38.5 dBiGain, Mid Band38.7 dBi

**Gain, Top Band** 38.9 dBi

Boresite Cross Polarization Discrimination (XPD) 30 dB

Page 1 of 6



Front-to-Back Ratio 67 dB 1.9° Beamwidth, Horizontal Beamwidth, Vertical 1.9° **Return Loss** 17.7 dB **VSWR** 1.3

Radiation Pattern Envelope Reference (RPE) 7282B

**Electrical Compliance** Brazil Anatel Class 2 | Canada SRSP 321.8 Part

B | ETSI 302 217 Class 4 | US FCC Part 101A

**Cross Polarization Discrimination (XPD) Electrical Compliance** ETSI EN 302217 XPD Category 2


Mechanical Specifications

**Compatible Mounting Pipe Diameter** 50 mm-115 mm | 2.0 in-4.5 in

±15° Fine Azimuth Adjustment Range **Fine Elevation Adjustment Range** ±15°

Wind Speed, operational 180 km/h | 111.847 mph Wind Speed, survival 250 km/h | 155.343 mph

#### Antenna Dimensions and Mounting Information

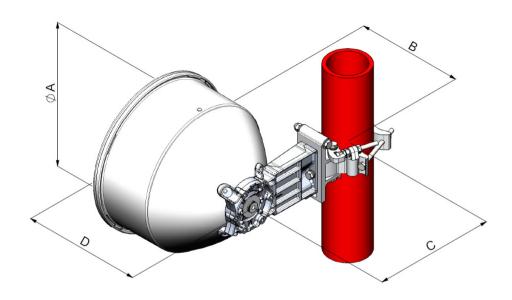

Dimension in Inches(mm)				
Antenna size, ft(m)	Α	В	С	D
1(0.3)	15.3(389)	11.3(287)	12.8(326)	12.6(319)

### Wind Forces at Wind Velocity Survival Rating

Axial Force (FA)

Angle α for MT Max

Side Force (FS)

**Twisting Moment (MT)** 

Zcg without Ice

Zcg with 1/2 in (12 mm) Radial Ice

Weight with 1/2 in (12 mm) Radial Ice

446 N | 100.265 lbf

0°

222 N | 49.908 lbf

144 N-m | 1,274.507 in lb


74 mm | 2.913 in

111 mm | 4.37 in

19 kg | 41.888 lb



### Wind Forces at Wind Velocity Survival Rating Image

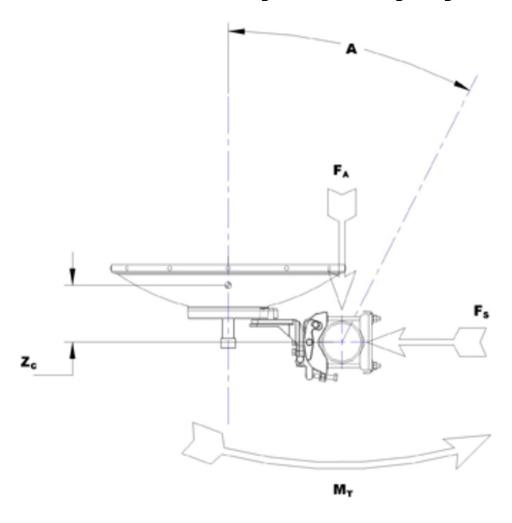

#### Packaging and Weights

Volume

Height, packed 450 mm | 17.717 in Width, packed 400 mm | 15.748 in Length, packed 400 mm | 15.748 in

**Packaging Type** Standard pack

Weight, gross 7.5 kg | 16.535 lb

Weight, net 6 kg | 13.228 lb

Regulatory Compliance/Certifications



0.1 m<sup>3</sup> | 3.531 ft<sup>3</sup>

Agency Classification

CHINA-ROHS Above maximum concentration value

ISO 9001:2015 Designed, manufactured and/or distributed under this quality management system

ROHS Compliant/Exempted

UK-ROHS Compliant



#### \* Footnotes

**Operating Frequency Band**Bands correspond with CCIR recommendations or common

allocations used throughout the world. Other ranges can be

accommodated on special order.

Gain, Mid Band For a given frequency band, gain is primarily a function of

antenna size. The gain of Andrew antennas is determined by either gain by comparison or by computer integration of the

measured antenna patterns.

**Boresite Cross Polarization Discrimination (XPD)**The difference between the peak of the co-polarized main

beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

Front-to-Back Ratio Denotes highest radiation relative to the main beam, at 180°

±40°, across the band. Production antennas do not exceed rated values by more than 2 dB unless stated otherwise.

**Return Loss**The figure that indicates the proportion of radio waves

incident upon the antenna that are rejected as a ratio of

those that are accepted.

**VSWR** Maximum; is the guaranteed Peak Voltage-Standing-Wave-

Ratio within the operating band.

**Radiation Pattern Envelope Reference (RPE)**Radiation patterns define an antenna's ability to discriminate

against unwanted signals. Under still dry conditions, production antennas will not have any peak exceeding the current RPE by more than 3dB, maintaining an angular

accuracy of +/-1° throughout

Cross Polarization Discrimination (XPD) Electrical Compliance The difference between the peak of the co-polarized main

beam and the maximum cross-polarized signal over an angle twice the 3 dB beamwidth of the co-polarized main beam.

**Wind Speed, operational**For VHLP(X), SHP(X), HX and USX antennas, the wind speed where the maximum antenna deflection is 0.3 x the 3 dB beam width of the antenna. For other antennas, it is defined

as a deflection is equal to or less than 0.1 degrees.

Page 5 of 6



Wind Speed, survival	The maximum wind speed the antenna, including mounts and radomes, where applicable, will withstand without permanent deformation. Realignment may be required. This wind speed is applicable to antenna with the specified amount of radial ice.
Axial Force (FA)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Side Force (FS)	Maximum side force exerted on the mounting pipe as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Twisting Moment (MT)	Maximum forces exerted on a supporting structure as a result of wind from the most critical direction for this parameter. The individual maximums specified may not occur simultaneously. All forces are referenced to the mounting pipe.
Packaging Type	Andrew standard packing is suitable for export. Antennas are shipped as standard in totally recyclable cardboard or wirebound crates (dependent on product). For your convenience, Andrew offers heavy duty export packing options.