# CBC78T-DS-43-2X | E14F05P50



#### 4 Pack Diplexer 700MHz/850MHz, DC sense, 4.3-10 Connectors

- BTS-to-feeder and feeder-to-antenna application
- New 4.3-10 connectors for improved PIM performance and size reduction
- Convertible mounting brackets

Product Type	Diplexer	
General Specifications		
Product Family	CBC78	
Color	Gray	
Common Port Label	COMM	
Modularity	4-Quad	
Mounting	Pole   Wall	
Mounting Pipe Hardware	Band clamps (2)	
RF Connector Interface	4.3-10 Female	
RF Connector Interface Body Style	Long neck	
Dimensions		
Height	162 mm   6.378 in	
Width	176 mm   6.929 in	
Depth	245 mm   9.646 in	

**Ground Screw Diameter** 


Product Classification


Page 1 of 4




6 mm | 0.236 in

#### Outline Drawing

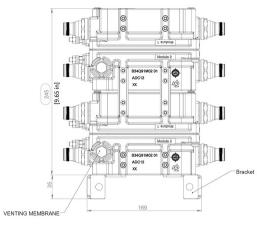

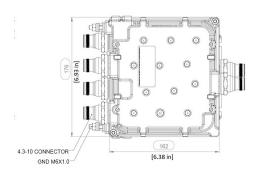



## Electrical Specifications

Impedance	50 ohm
License Band, Band Pass	CEL 850   USA 700   USA 750

#### Electrical Specifications, dc Power/Alarm

dc/AISG Pass-through Method	Auto sensing
dc/AISG Pass-through Path	See logic table
Lightning Surge Current	10 kA
Lightning Surge Current Waveform	8/20 waveform

## **Electrical Specifications**

Sub-module	1   2   3   4	1   2   3   4	1   2   3   4
Branch	1	1	2
Port Designation		698-803	824-894
License Band	USA 700, Band Pass	USA 700, Band Pass	CEL 850, Band Pass

Page 2 of 4



©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 20, 2025

# CBC78T-DS-43-2X | E14F05P50


USA 750, Band Pass

USA 750, Band Pass

## Electrical Specifications, Band Pass

•			
Frequency Range, MHz	698–798	698-803	824-894
Insertion Loss, typical, dB	0.2	0.3	0.2
Total Group Delay, maximum, ns		45	35
Return Loss, minimum, dB		22	22
Return Loss, typical, dB		24	24
Isolation, minimum, dB	50	35	50
Input Power, RMS, maximum, W		200	200
Input Power, PEP, maximum, W		2000	2000
3rd Order PIM, minimum, dBc		-161	-161
3rd Order PIM Test Method		2 x 20 W CW tones	2 x 20 W CW tones

#### Block Diagram

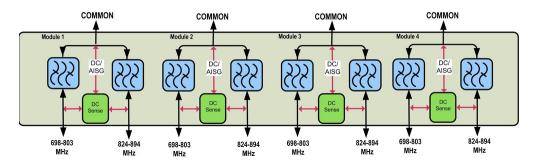

Logic Table





©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 20, 2025

## CBC78T-DS-43-2X | E14F05P50

Combining I	Mode Operation (Gro	ound Based)	
F	RF Ports Input Voltag	е	
700 MHz	800 MHz	COMMON	DC/AISG Path Selection
7 ≤ V ≤ 30	V<7	V<7 V<7	700 MHz to COMMON "ON"
			800 MHz Port "OFF"
V<7	<b>7</b> ≤ <b>V</b> ≤ 30 V<7	N . 7	800 MHz to COMMON "ON"
V </td <td>V<!--</td--><td>700 MHz "OFF"</td></td>		V </td <td>700 MHz "OFF"</td>	700 MHz "OFF"
7 ≤ V ≤ 30 7 ≤ V ≤ 30 V<7	7 < 1/ < 20	1/27	700 MHz to COMMON "ON"
	V </td <td>800 MHz "OFF"</td>	800 MHz "OFF"	
V<7	V<7	V<7	ALL ports OFF

(q	wer Top)	Mode Operation (To	Splitting
	e	RF Ports Input Voltag	F
MON DC/AISG Path Selection	COMMON	800 MHz	700 MHz
700 MHz to COMMON "OI	7 ≤ V ≤ 30	V<7	V<7
≤ 30 800 MHz "OFF"	$7 \leq V \leq 30$	V V</</td	

#### **Environmental Specifications**

Operating Temperature	-40 °C to +65 °C (-40 °F to +149 °F)
Relative Humidity	5%-100%
Corrosion Test Method	IEC 60068-2-11, 30 days
Ingress Protection Test Method	IEC 60529:2001, IP67

#### Packaging and Weights

Included	Mounting hardware
Mounting Hardware Weight	0.5 kg   1.102 lb
Weight, without mounting hardware	9.4 kg   20.723 lb

#### Regulatory Compliance/Certifications

#### Agency Classification

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system

ANDREW an Amphenol company

©2025 ANDREW, an Amphenol company. All rights reserved. Amphenol and ANDREW are registered trademarks of Amphenol and/or its affiliates in the U.S. and other countries. All product names, trademarks and registered trademarks are property of their respective owners. Revised: March 20, 2025

Page 4 of 4