

Single Triplexer 700-800//900//1800-2600 MHz, (DC Smart Bypass), 4.3-10 connectors

- New 4.3-10 connectors for improved PIM performance and size reduction
- Designed for network modernization application, introduction of LTE700 and LTE800 on existing site
- Industry leading PIM performance
- DC/AISG SMART bypass functionality

Product Classification

Product Type	Triplexer
General Specifications	
Product Family	CBC7926
Color	Gray
Common Port Label	COM
Modularity	1-Single
Mounting	Pole Wall
Mounting Pipe Hardware	Band clamps (2)
RF Connector Interface	7-16 DIN Female
RF Connector Interface Body Style	Medium neck
Dimensions	
Height	257 mm 10.118 in


lioight	20, 1111 10.1101
Width	251 mm 9.882 in
Depth	63.5 mm 2.5 in
Mounting Pipe Diameter Range	42.6-122 mm

Outline Drawing

Page 1 of 6

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 16, 2023

COMMSCOPE°

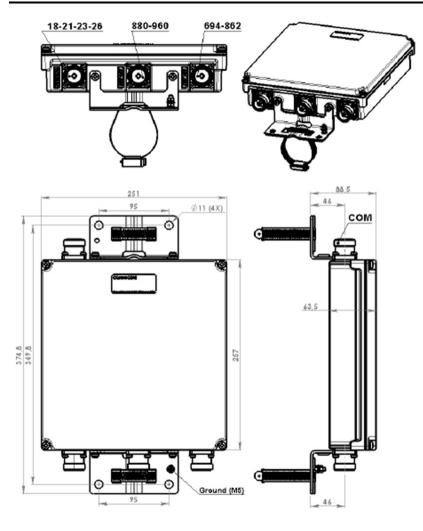

Electrical Specifications

Impedance	50 ohm
License Band, Band Pass	APT 700 AWS 1700 CEL 900 DCS 1800 EDD 800 IMT 2100 IMT 2600 LMR 750 PCS 1900 USA 700 USA 750

Electrical Specifications, dc Power/Alarm

dc/AISG Pass-through Method	Auto sensing
dc/AISG Pass-through Path	See logic table
dc/AISG Pass-through, combiner	dc Sensing
Lightning Surge Current	5 kA
Lightning Surge Current Waveform	8/20 waveform

Page 2 of 6

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 16, 2023

COMMSCOPE°

Electrical Specifications

Sub-module	1 2	1 2	1 2
Branch	1	2	3
Port Designation	DD2-800	900	18-21-23-26
License Band	APT 700, Band Pass EDD 800, Band Pass LMR 750, Band Pass USA 700, Band Pass USA 750, Band Pass	CEL 900, Band Pass	AWS 1700, Band Pass DCS 1800, Band Pass IMT 2100, Band Pass IMT 2600, Band Pass PCS 1900, Band Pass

Electrical Specifications, Band Pass


Frequency Range, MHz	694-862	880-960	1710-2690
Insertion Loss, typical, dB	0.35	0.3	0.35
Return Loss, minimum, dB	18	18	18
Return Loss, typical, dB	22	22	22
Isolation, minimum, dB	50	50	50
Input Power, RMS, maximum, W	300	300	300
Input Power, PEP, maximum, W	3000	3000	3000
3rd Order PIM, typical, dBc	-160	-160	-160
3rd Order PIM Test Method	Two +43 dBm carriers	Two +43 dBm carriers	Two +43 dBm carriers

Block Diagram

Page 3 of 6

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 16, 2023



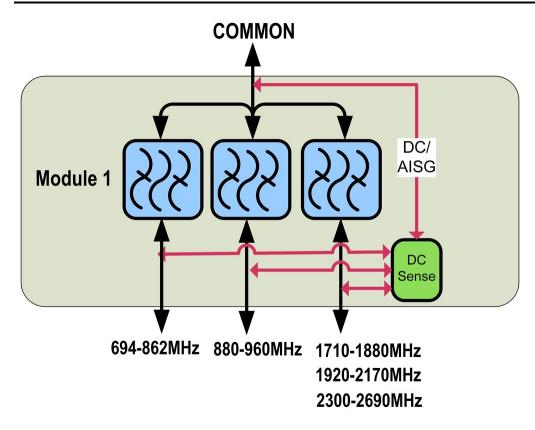

Page 4 of 6

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 16, 2023



Logic Table

MODE	сом	PORT 3 694-862	PORT 2 880-960	PORT 1 18-21-23-26	S	Ports (1-3) is sa 798 766 8 12 0 4	PORT 2 880-960	PORT 1 18-21-23-26	PORT 3 694-862	PORT 2 880-960	PORT 1 18-21-23-26	
	Input Voltage				Selected Port					Led		
	<7V	<7V	<7V	>7V	ON	OFF	OFF	ON	off	off	Green	
b l	<7V	<7V	>7V	<7V	ON	OFF	ON	OFF	off	Green	off	
ž	<7V	>7V	<7V	<7V	ON	ON	OFF	OFF	Green	off	off	
E I	<7V	<7V	>7V	>7V	ON	OFF	OFF	ON	off	Red	Green	
COMBINER Mode	<7V	>7V	<7V	>7V	ON	OFF	OFF	OFF	Red	off	Green	
0	<7V	>7V	>7V	<7V	ON	OFF	ON	OFF	Green	Red	off	
	<7V	>7V	>7V	>7V	ON	OFF	OFF	OFF	Red	Red	Green	

	SPLITTER Mode: COM Port is split to Ports (1-3) with valid impedance										
MODE	COM	PORT 3 694-862	PORT 2 880-960	PORT 1 18-21-23-26	сом	PORT 3 694-862	PORT 2 880-960	PORT 1 18-21-23-26	PORT 3 694-862	PORT 2 880-960	PORT 1 18-21-23-26
		DC Port Imped	ance Ports 1,2,3	,4 Voltage <7V		Selecte	ed Port			Led	
	>7V	short	short	open/load	ON	OFF	OFF	ON	OFF	OFF	Green
a	>7V	short	open/load	short	ON	OFF	ON	OFF	OFF	Green	OFF
pol	>7V	short	open/load	open/load	ON	OFF	ON	ON	OFF	Green*	Green*
>											
8	>7V	open/load	short	short	ON	ON	OFF	OFF	Green	OFF	OFF
TTER	>7V >7V	open/load open/load			ON ON						OFF Green*
PLITTER			short	short		ON	OFF	OFF	Green	OFF	
SPLITTER Mode	>7V	open/load	short short	short open/load	ON	ON ON	OFF OFF	OFF ON	Green Green*	OFF OFF	Green*

*If the input voltage is from 7V to 19V, the green LEDs will be on one at a time, each for 2 seconds indicating DC voltage is available

at the RF port corresponding to the LED Green lighted Alternating LEDs is merely a mechanism to save power consumption.

Environmental Specifications

Operating Temperature	-40 °C to +65 °C (-40 °F to +149 °F)
Relative Humidity	Up to 100%
Corrosion Test Method	IEC 60068-2-11, 30 days
Ingress Protection Test Method	IEC 60529:2001, IP67

Packaging and Weights

Included	Mounting hardware
Volume	4.1 L
Weight, net	4.5 kg 9.921 lb
Weight, without mounting hardware	4 kg 8.818 lb

Regulatory Compliance/Certifications

Agency

Classification

ISO 9001:2015

Designed, manufactured and/or distributed under this quality management system



Page 5 of 6

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 16, 2023



Page 6 of 6

©2024 CommScope, Inc. All rights reserved. CommScope and the CommScope logo are registered trademarks of CommScope and/or its affiliates in the U.S. and other countries. For additional trademark information see https://www.commscope.com/trademarks. All product names, trademarks and registered trademarks are property of their respective owners. Revised: November 16, 2023

COMMSCOPE®