


UA-3C

Polymer Angle Adapter

Bulletin 7845633 Rev. A | Page 1 of 1


CommScope Infrastructure Academy offers installation training.



The torque stop screw has two heads.

The top head will snap off when correct tightening torque is achieved. The bottom head will remain to enable adapter removal.


1



3-5Nm torque


Place adapter on mounting structure. Engage ½" wrench on top head and tighten at a slow and steady pace. The top head is designed to snap at the correct torque. Do not tighten further.

2

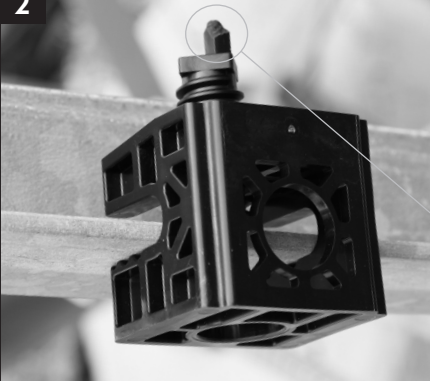


Adapter is shown here with the top head completely snapped off. Remove remaining screw fragment.

3



For removal, use bottom head to unscrew with ½" wrench head. For re-attachment, use torque wrench on bottom head and tighten screw to 3-5Nm.



Maximum loading:
3 polymer hangers (shown) or two metal hangers.

Hanger	Dimensions
SSH-47	PIM free hanger for 4 to 7 mm cables
SSH-710	PIM free hanger for 7.1 to 10 mm cables
SSH-1014	PIM free hanger for 10.1 to 14 mm cables
SSH-1416	PIM free hanger for 14.1 to 16 mm cables

CommScope

1100 CommScope Place SE P.O. Box 339, Hickory, NC 28603-0339
(828) 324-2200 (800) 982-1708
www.commscope.com

Customer Service 24 hours

North America: +1-800-255-1479 (toll free)
Any country: +1-779-435-6500
email: acicustomersupportcenter@commscope.com

Notice: CommScope disclaims any liability or responsibility for the results of improper or unsafe installation, inspection, maintenance, or removal practices.
Aviso: CommScope no acepta ninguna obligación ni responsabilidad como resultado de prácticas incorrectas o peligrosas de instalación, inspección, mantenimiento o retiro.
Avis : CommScope décline toute responsabilité pour les conséquences de procédures d'installation, d'inspection, d'entretien ou de retrait incorrectes ou dangereuses.
Hinweis: CommScope lehnt jede Haftung oder Verantwortung für Schäden ab, die aufgrund unsachgemäßer Installation, Überprüfung, Wartung oder Demontage auftreten.
Atenção: A CommScope abdica do direito de toda responsabilidade pelos resultados de práticas inadequadas e sem segurança de instalação, inspeção, manutenção ou remoção.
Avvertenza: CommScope declina eventuali responsabilità derivanti dall'esecuzione di procedure di installazione, ispezione, manutenzione e smontaggio improprie o poco sicure.
注意: CommScope 公司申明對於不恰當或不安全的安裝、檢驗、維修或拆卸操作所導致的後果不負任何義務和責任

